



SRK25ZMP-S

Inverter Wall Mount



Compact and Light weight

The SRK-ZMP-S series offers great installation flexibility.



Wireless
remote control



SRK25ZMP-S
SRC35ZMP-S



SRC45ZMP-S

FUNCTIONS

Energy saving



Air flow



Clean operation & Filter



Comfort & Convenience



Others



SPECIFICATIONS


Indoor unit			SRK25ZMPS	SRK35ZMPS	SRK45ZMPS
Outdoor unit			SRC25ZMPS	SRC35ZMPS	SRC45ZMPS
Power source			1 Phase, 220 240V, 50Hz		
Nominal cooling capacity (Min~Max)		kW	2.5(0.9~2.8)	3.2(0.9~3.5)	4.5(0.9~4.8)
Nominal heating capacity (Min~Max)		kW	2.8(0.8~3.9)	3.6(0.9~4.3)	5.0(0.8~5.8)
Power consumption	Cooling/Heating	kW	0.78 / 0.755	0.995 / 0.995	1.495 / 1.385
EER/COP	Cooling/Heating		3.21/3.71	3.22 / 3.62	3.01 / 3.61
Inrush current	220/230/240 V	A	3.9 / 3.8 / 3.6	4.9 / 4.7 / 4.5	7.0 / 6.7 / 6.4
Max. running current			9	9	14
Sound power level	Indoor	Cooling/Heating	59 / 58	60 / 58	60 / 64
	Outdoor	Cooling/Heating	60 / 59	60 / 60	65 / 65
Sound pressure level	Indoor	Cooling (Hi/Me/Lo)	45 / 34 / 23	47 / 36 / 23	46 / 40 / 25
	Indoor	Heating (Hi/Me/Lo)	43 / 34 / 26	44 / 36 / 28	48 / 43 / 32
Air flow	Outdoor	Cooling/Heating	47 / 45	49 / 48	52 / 53
	Indoor	Cooling (Hi/Me/Lo)	10.1 / 7.3 / 4.2	9.5 / 6.8 / 4.2	9.0 / 7.2 / 3.8
Air flow	Indoor	Heating (Hi/Me/Lo)	9.5 / 7.3 / 5.2	9.6 / 7.4 / 5.5	12.0 / 9.2 / 6.2
	Outdoor	Cooling/Heating	26.0 / 19.7	25.4 / 20.5	35.5 / 33.5
Exterior dimensions	Indoor	HeightxWidthxDepth	262 x 769 x 210		
Net weight	Indoor / Outdoor		6.9 / 25	7.2 / 27	7.6 / 40
Refrigerant		Type/GWP	R410A / 2088		
Refrigerant piping size		Charge	0.655 / 1.368	0.81 / 1.691	1.20 / 2.506
Refrigerant line (one way) length		Liquid/Gas	6.35(1/4") / 9.52(3/8")		
Vertical height differences		Outdoor is higher/lower	Max. 15		
Outdoor operating temperature range		Cooling	Max. 10 / Max. 10		
Clean filter		Heating	15~46		
			15~24		



SRK25ZMP-S

Inverter Wall Mount

SRK25ZMP-S Indoor Unit

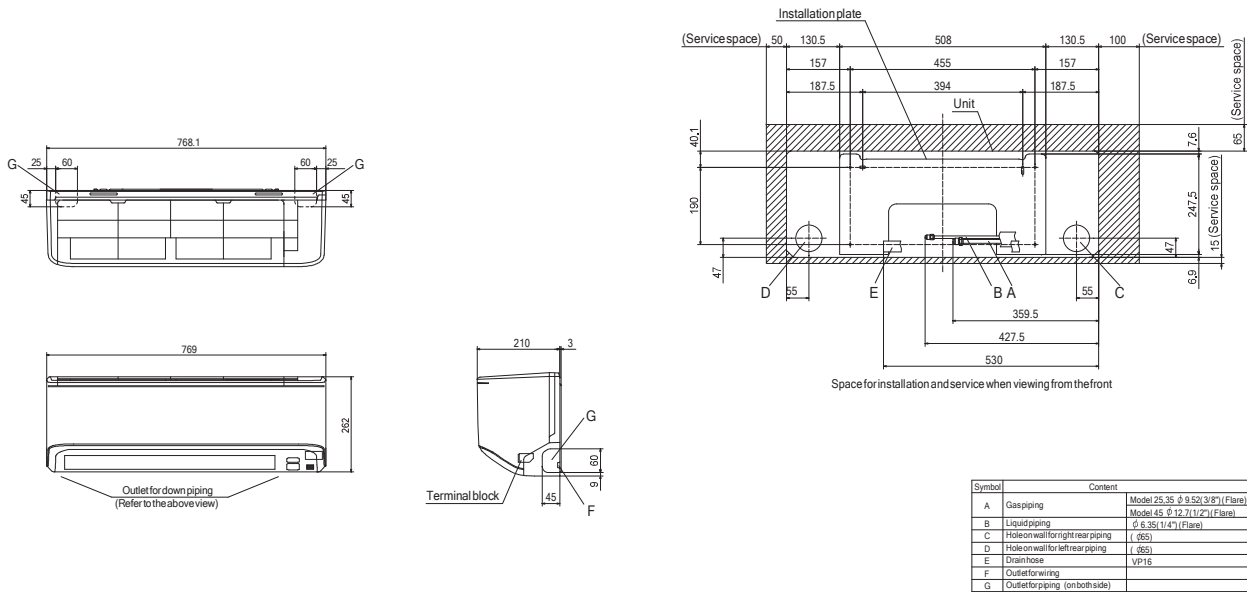

SRC25ZMP-S Outdoor Unit

