



SRK45ZMP-S

Inverter Wall Mount



Compact and Light weight

The SRK-ZMP-S series offers great installation flexibility.



Wireless remote control



SRC25ZMP-S
SRC35ZMP-S



SRC45ZMP-S

FUNCTIONS

Energy saving



Air flow



Clean operation & Filter



Comfort & Convenience



Others



SPECIFICATIONS


Indoor unit			SRK25ZMPS	SRK35ZMPS	SRK45ZMPS
Outdoor unit			SRC25ZMPS	SRC35ZMPS	SRC45ZMPS
Power source			1 Phase, 220 240V, 50Hz		
Nominal cooling capacity (Min~Max)		kW	2.5(0.9~2.8)	3.2(0.9~3.5)	4.5(0.9~4.8)
Nominal heating capacity (Min~Max)		kW	2.8(0.8~3.9)	3.6(0.9~4.3)	5.0(0.8~5.8)
Power consumption		Cooling/Heating	0.78 / 0.755	0.995 / 0.995	1.495 / 1.385
EER/COP		Cooling/Heating	3.21/3.71	3.22 / 3.62	3.01 / 3.61
Inrush current		220/230/240 V	3.9 / 3.8 / 3.6	4.9 / 4.7 / 4.5	7.0 / 6.7 / 6.4
Max. running current			9	9	14
Sound power level	Indoor	Cooling/Heating	59 / 58	60 / 58	60 / 64
	Outdoor	Cooling/Heating	60 / 59	60 / 60	65 / 65
Sound pressure level	Indoor	Cooling (Hi/Me/Lo)	45 / 34 / 23	47 / 36 / 23	46 / 40 / 25
		Heating (Hi/Me/Lo)	43 / 34 / 26	44 / 36 / 28	48 / 43 / 32
	Outdoor	Cooling/Heating	47 / 45	49 / 48	52 / 53
Air flow	Indoor	Cooling (Hi/Me/Lo)	10.1 / 7.3 / 4.2	9.5 / 6.8 / 4.2	9.0 / 7.2 / 3.8
		Heating (Hi/Me/Lo)	9.5 / 7.3 / 5.2	9.6 / 7.4 / 5.5	12.0 / 9.2 / 6.2
	Outdoor	Cooling/Heating	26.0 / 19.7	25.4 / 20.5	35.5 / 33.5
Exterior dimensions	Indoor	HeightxWidthxDepth	262 x 769 x 210		
	Outdoor		540 x 645(+57) x 275		
Net weight		Indoor / Outdoor	6.9 / 25	7.2 / 27	7.6 / 40
Refrigerant		Type/GWP	R410A / 2088		
		Charge	0.655 / 1.368	0.81 / 1.691	1.20 / 2.506
Refrigerant piping size		Liquid/Gas	6.35(1/4") / 9.52(3/8")		
Refrigerant line (one way) length			Max. 15		
Vertical height differences		Outdoor is higher/lower	Max. 10 / Max. 10		
Outdoor operating temperature range		Cooling	15~46		
		Heating	15~24		
Clean filter					




SRK45ZMP-S

Inverter Wall Mount

SRK45ZMP-S Indoor Unit

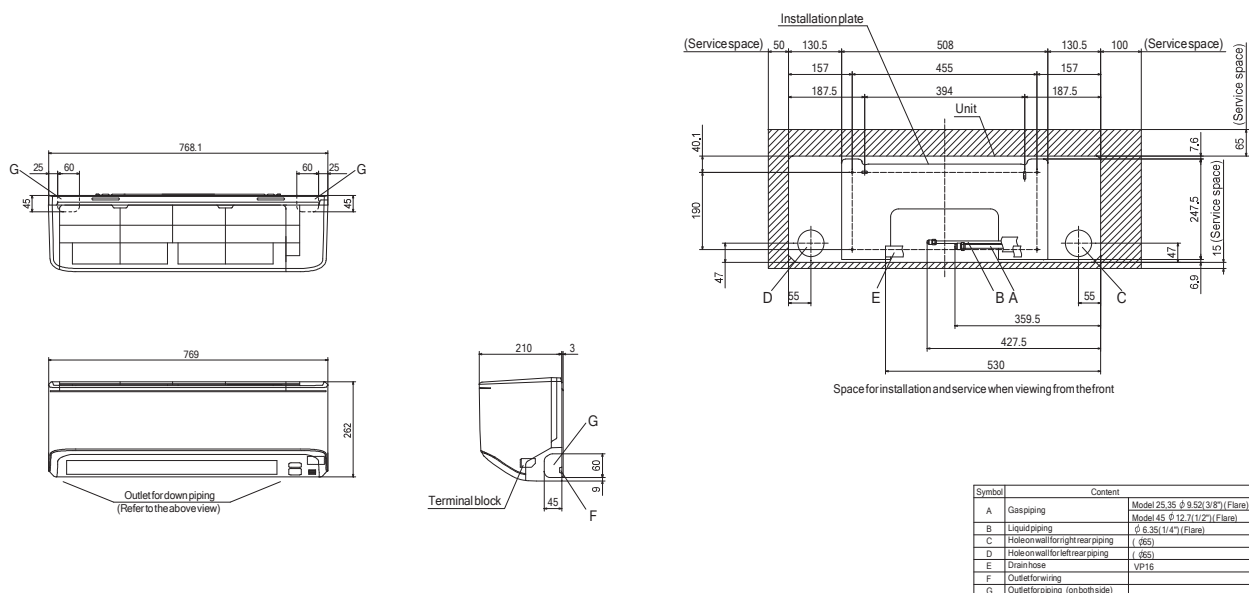

SRC45ZMP-S Outdoor Unit

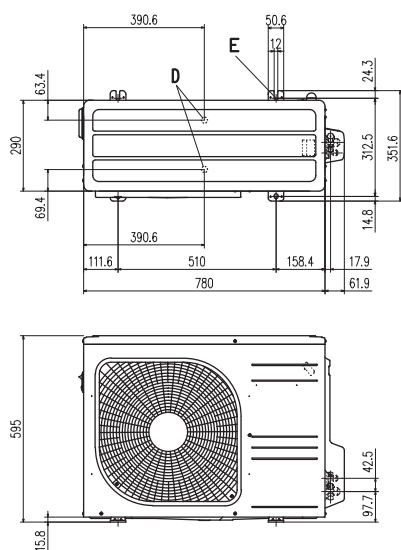

Symbol	Content
A	Service valve connection (gas side) ZMX: $\phi 5.52 (3/8")$ (flare) ZS ZMP: $\phi 12.7 (1/2")$ (flare)
B	Service valve connection (liquid side) $\phi 6.35 (1/4")$ (Flare)
C	Pipe/cable draw-out hole
D	Drain discharge hole $\phi 20 \times 2$ places
E	Anchor ball hole $M10 \times 4$ places

Examples of Installation Dimensions	I	II	III	IV
L1	Open	280	280	180
L2	100	75	Open	Open
L3	100	80	80	80
L4	250	Open	250	Open

