




SRK100ZR-S

Micro Inverter Wall Mount



Vane Control System

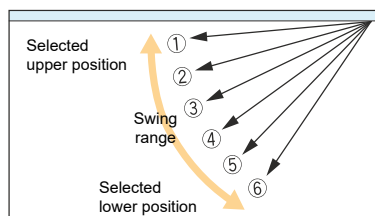

Long Reach Air Flow

Powerful airflow is realized by Jet technology. Good for large living rooms and shops, which increase comfort.



FDC100VNA/VSA

FUNCTIONS

Energy saving



Air flow



Clean operation & Filter



Comfort & Convenience



Others



SPECIFICATIONS


		Micro Inverter	
		SRK100VNAZR	SRK100VSAZR
Set model name		SRK100ZR-S	SRK100ZR-S
Indoor unit		FDC100VNA	FDC100VSA
Outdoor unit		1 Phase 220-240V, 50Hz / 220V, 60Hz	3 Phase 380-415V, 50Hz / 380V, 60Hz
Power source			
Nominal cooling capacity (Min-Max)	kW	10.0 (4.0 ~ 11.2)	10.0 (4.0 ~ 11.2)
Nominal heating capacity (Min-Max)	kW	11.2 (4.0 ~ 12.5)	11.2 (4.0 ~ 12.5)
Power consumption	Cooling/Heating	3.19 / 2.78	3.19 / 2.78
EER/COP	Cooling/Heating	3.13 / 4.03	3.13 / 4.03
Inrush current		5	5
Max. current		24	15
Sound power level*1	Indoor*2	Cooling/Heating	63 / 63
	Outdoor	Cooling/Heating	70 / 70
Sound pressure level*1	Indoor*2	Cooling (Hi/Me/Lo/Ulo)	48 / 45 / 40 / 27
	Outdoor	Heating (Hi/Me/Lo/Ulo)	48 / 43 / 38 / 30
		Cooling/Heating	54 / 56
Air flow	Indoor*2	Cooling (Hi/Me/Lo/Ulo)	24.5 / 21.3 / 17.6 / 10.4
	Outdoor	Heating (Hi/Me/Lo/Ulo)	27.5 / 23.2 / 19.1 / 13.6
		Cooling/Heating	75 / 73
Exterior dimensions	Indoor	HeightxWidthxDepth	mm
	Outdoor		339 / 1,197 / 262
	Indoor		845 / 970 / 370
Net weight	Indoor		16.5
	Outdoor		82
Ref.piping size	Liquid/Gas	ømm	9.52(3/8") / 15.88(5/8")
Refrigerant line (one way) length		m	Max.50
Vertical height differences	Outdoor is higher/lower	m	Max.50 / Max.15
Outdoor operating temperature range	Cooling	°C	-15~50*3
	Heating		-20~20
Air filter, Q'ty			Polypropylene net x2 (Washable)
Remote control (option)			wired:RC-EX3, RC-E5, RCH-E3 & Interface kit:SC-BIKN2-E



SRK100ZR-S

Micro Inverter Wall Mount

SRK100ZR-S Indoor Unit

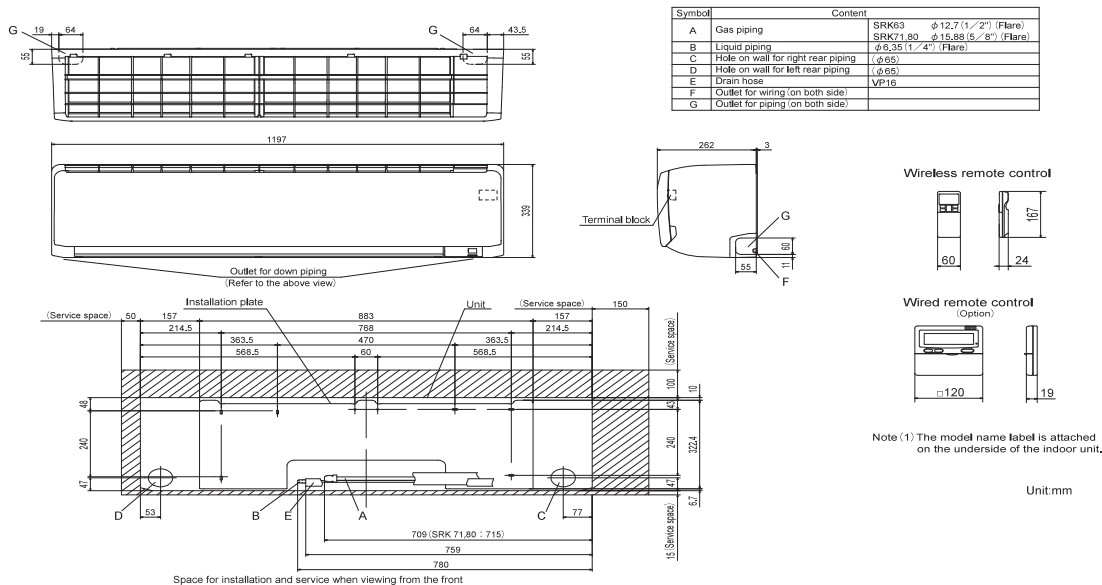

FDC100VNA Outdoor Unit

