



SRK20ZSX-S

Hyper Inverter Wall Mount



SRK-ZSX series can be selected for use as indoor units in the combination with SCM Multi system outdoor-unit.



Wireless remote control



SRC20ZSX-S, SRC25ZSX-S, SRC35ZSX-S, SRC50ZSX-S, SRC60ZSX-S

FUNCTIONS

Energy saving



Air flow



Clean operation & Filter



Comfort & Convenience



Others



SPECIFICATIONS


			SRK20ZSX-S	SRK25ZSX-S	SRK35ZSX-S	SRK50ZSX-S	SRK60ZSX-S
Indoor unit			SRK20ZSX-S	SRK25ZSX-S	SRK35ZSX-S	SRK50ZSX-S	SRK60ZSX-S
Outdoor unit			SRK20ZSX-S	SRK25ZSX-S	SRK35ZSX-S	SRK50ZSX-S	SRK60ZSX-S
Power source			1Phase, 220 - 240, 50Hz				
Nominal cooling capacity (Min~Max)			kW	2.0 (0.9~3.2)	2.5 (0.9~3.7)	3.5 (0.9~4.3)	5.0 (1.0~5.8)
Nominal heating capacity (Min~Max)			kW	2.7 (0.8~5.3)	3.2 (0.8~5.8)	4.3 (0.8~6.6)	6.0 (0.6~8.1)
Power consumption		Cooling/Heating	kW	0.32 / 0.47	0.44 / 0.59	0.78 / 0.90	1.30 / 1.36
EER/COP		Cooling/Heating		6.25 / 5.74	5.68 / 5.42	4.49 / 4.78	3.85 / 4.41
Inrush current			A	2.5	3.0	4.3	5.0
Max. running current				9	9	9	15
Sound power level	Indoor	Cooling/Heating		53 / 53	55 / 56	58 / 58	59 / 62
	Outdoor	Cooling/Heating		56 / 58	57 / 58	61 / 62	63 / 63
Sound pressure level	Indoor	Cooling (Hi/Me/Lo/Ulo)	dB(A)	38 / 31 / 24 / 19	39 / 33 / 25 / 19	43 / 35 / 26 / 19	44 / 39 / 31 / 22
		Heating (Hi/Me/Lo/Ulo)		38 / 32 / 25 / 19	40 / 34 / 27 / 19	41 / 35 / 28 / 19	46 / 41 / 33 / 23
	Outdoor	Cooling/Heating		43 / 44	44 / 45	48 / 47	50 / 49
		Cooling (Hi/Me/Lo/Ulo)		43 / 44	44 / 45	48 / 47	50 / 49
Air flow	Indoor	Cooling (Hi/Me/Lo/Ulo)	m³/min	11.3 / 9.1 / 6.0 / 5.0	12.2 / 10.0 / 6.7 / 5.0	13.1 / 10.8 / 7.3 / 5.0	14.3 / 12.4 / 7.8 / 5.4
		Heating (Hi/Me/Lo/Ulo)		12.2 / 10.3 / 7.2 / 5.4	12.8 / 11.0 / 7.8 / 5.4	13.9 / 11.8 / 8.6 / 5.4	17.3 / 14.3 / 9.8 / 6.2
	Outdoor	Cooling/Heating		31.0 / 31.0	31.0 / 31.0	36.0 / 31.0	39.0 / 33.0
		Cooling/Heating		31.0 / 31.0	31.0 / 31.0	36.0 / 31.0	39.0 / 33.0
Exterior dimensions	Indoor	HeightxWidthxDepth	mm	305 x 920 x 220			
	Outdoor	HeightxWidthxDepth	mm	640 x 800(+71) x 290			
Net weight		Indoor / Outdoor	kg	13.0 / 43.0			13.0 / 45.0
Refrigerant	Type/GWP			R410A / 2088			
	Charge	kg/CO ₂ Eq		1.45 / 3.028			1.50 / 3.132
Refrigerant piping size		Liquid/Gas	ø mm	6.35(1/4") / 9.52(3/8")			6.35(1/4") / 12.7(1/2")
Refrigerant line (one way) length		m		Max.25			Max.30
Vertical height differences		Outdoor is higher/lower	m	Max.15 / Max.15			Max.20 / Max.20
Outdoor operating temperature range	Cooling	°C		-15~46			
	Heating	°C		-20 ~ 24			
Clean filter				Allergen Clear Filter x 1, Photocatalytic Washable Deodorizing Filter x 1			



SRK20ZSX-S

Hyper Inverter Wall Mount

SRK20ZSX-S Indoor Unit

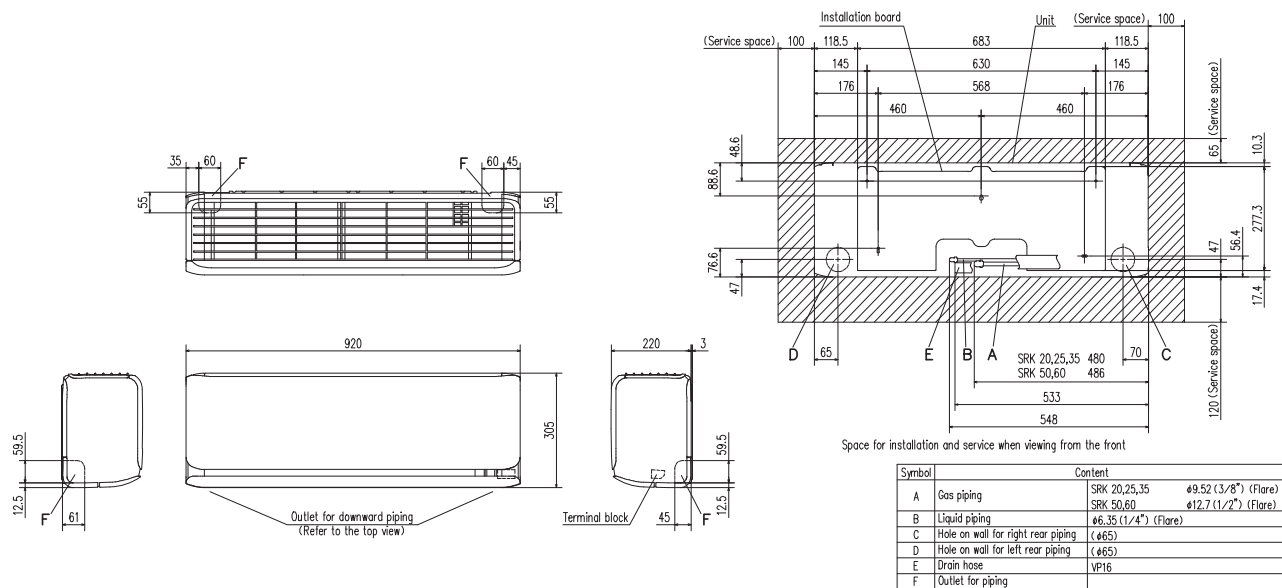

SRC20ZSX-S Outdoor Unit

