



# SRK20ZSX-W

Hyper Inverter Wall Mount



White ZSX-W



Titanium ZSX-WT



Contrast ZSX-WB



SRK-ZSX series can be selected for use on both R32 and R410a outdoor units.



SRK-ZSX series can be selected for use as indoor units in a combination with the SCM Multi system outdoor unit.



Wireless remote control



SRC20ZSX-W, SRC25ZSX-W  
SRC35ZSX-W, SRC50ZSX-W  
SRC60ZSX-W

### FUNCTIONS

Energy saving



Air flow



Clean operation & Filter



Comfort & Convenience



Others


| Indoor unit                         |                 |                                                  |                         | SRK20ZSX-W-WB-WT                                                          | SRK25ZSX-W-WB-WT        | SRK35ZSX-W-WB-WT        | SRK50ZSX-W-WB-WT         | SRK60ZSX-W-WB-WT        |
|-------------------------------------|-----------------|--------------------------------------------------|-------------------------|---------------------------------------------------------------------------|-------------------------|-------------------------|--------------------------|-------------------------|
| Outdoor unit                        |                 |                                                  |                         | SRC20ZSX-W                                                                | SRC25ZSX-W              | SRC35ZSX-W              | SRC50ZSX-W               | SRC60ZSX-W              |
| Power source                        |                 |                                                  |                         | 1Phase, 220 - 240, 50Hz                                                   |                         |                         |                          |                         |
| Nominal cooling capacity (Min~Max)  |                 |                                                  | kW                      | 2.0 (0.9~3.4)                                                             | 2.5 (0.9~3.8)           | 3.5 (0.9~4.5)           | 5.0 (1.0~6.2)            | 6.1 (1.0~6.9)           |
| Nominal heating capacity (Min~Max)  |                 |                                                  | kW                      | 2.7 (0.8~5.5)                                                             | 3.2 (0.8~6.0)           | 4.3 (0.8~6.8)           | 6.0 (0.8~8.2)            | 6.8 (0.8~8.8)           |
| Power consumption                   | Cooling/Heating | kW                                               |                         | 0.31 / 0.47                                                               | 0.44 / 0.59             | 0.74 / 0.90             | 1.24 / 1.36              | 1.71 / 1.65             |
| EER/COP                             | Cooling/Heating |                                                  |                         | 6.45 / 5.74                                                               | 5.68 / 5.42             | 4.73 / 4.78             | 4.03 / 4.41              | 3.57 / 4.12             |
| Max. running current                |                 |                                                  | A                       | 9                                                                         | 9                       | 9                       | 15                       | 15                      |
| Sound power level                   | Indoor          | Cooling/Heating                                  | dB(A)                   | 53 / 55                                                                   | 55 / 56                 | 58 / 58                 | 59 / 62                  | 62 / 63                 |
|                                     | Outdoor         | Cooling/Heating                                  |                         | 56 / 58                                                                   | 57 / 58                 | 61 / 62                 | 63 / 61                  | 65 / 64                 |
| Sound pressure level                | Indoor          | Cooling (Hi/Me/Lo/Ulo)<br>Heating (Hi/Me/Lo/Ulo) |                         | 38 / 31 / 24 / 19                                                         | 39 / 33 / 25 / 19       | 43 / 35 / 26 / 19       | 44 / 39 / 31 / 22        | 48 / 41 / 33 / 22       |
|                                     | Outdoor         | Cooling/Heating                                  |                         | 38 / 33 / 25 / 19                                                         | 40 / 34 / 27 / 19       | 42 / 35 / 28 / 19       | 47 / 41 / 33 / 23        | 47 / 42 / 34 / 23       |
| Air flow                            | Indoor          | Cooling/Heating                                  |                         | 43 / 45                                                                   | 44 / 45                 | 48 / 47                 | 51 / 49                  | 52 / 53                 |
|                                     |                 | Cooling (Hi/Me/Lo/Ulo)<br>Heating (Hi/Me/Lo/Ulo) |                         | 11.3 / 9.1 / 6.0 / 5.0                                                    | 12.2 / 10.0 / 6.7 / 5.0 | 13.1 / 10.8 / 7.3 / 5.0 | 14.3 / 12.4 / 7.8 / 5.4  | 16.3 / 13.4 / 8.9 / 5.4 |
|                                     | Outdoor         | Cooling/Heating                                  | 12.2 / 10.3 / 7.2 / 5.4 | 12.8 / 11.0 / 7.8 / 5.4                                                   | 13.9 / 11.8 / 8.6 / 5.4 | 17.3 / 14.3 / 9.8 / 6.2 | 17.8 / 13.7 / 10.9 / 6.2 |                         |
| Exterior dimensions                 |                 |                                                  |                         |                                                                           |                         |                         |                          |                         |
| Net weight                          | Indoor          | HeightxWidthxDepth                               | mm                      | 305 x 920 x 220                                                           |                         |                         |                          |                         |
|                                     | Outdoor         | HeightxWidthxDepth                               | mm                      | 640 x 800(+71) x 290                                                      |                         |                         |                          |                         |
| Net weight                          |                 |                                                  | Indoor / Outdoor        | kg                                                                        |                         |                         | 13.0 / 43.0              |                         |
| Refrigerant                         |                 |                                                  | Type/GWP                | R32 / 675                                                                 |                         |                         |                          |                         |
|                                     |                 |                                                  | Charge                  | ig/TCO/Eq                                                                 |                         |                         | 1.20 / 0.810             |                         |
| Refrigerant piping size             |                 |                                                  | Liquid/Gas              | ø mm                                                                      |                         |                         | 6.35(1/4") / 9.52(3/8")  |                         |
| Refrigerant line (one way) length   |                 |                                                  | m                       | Max 25                                                                    |                         |                         | 6.35(1/4") / 12.7(1/2")  |                         |
| Vertical height differences         |                 |                                                  | Outdoor is higher/lower | m                                                                         |                         |                         | Max.30                   |                         |
| Outdoor operating temperature range |                 |                                                  | Cooling                 | °C                                                                        |                         |                         |                          |                         |
|                                     |                 |                                                  | Heating                 | -15~46                                                                    |                         |                         |                          |                         |
| Clean filter                        |                 |                                                  |                         | -20~24                                                                    |                         |                         |                          |                         |
|                                     |                 |                                                  |                         | Allergen Clear Filter x 1, Photocatalytic Washable Deodorizing Filter x 1 |                         |                         |                          |                         |



# SRK20ZSX-W

Hyper Inverter Wall Mount

## SRK20ZSX-W Indoor Unit

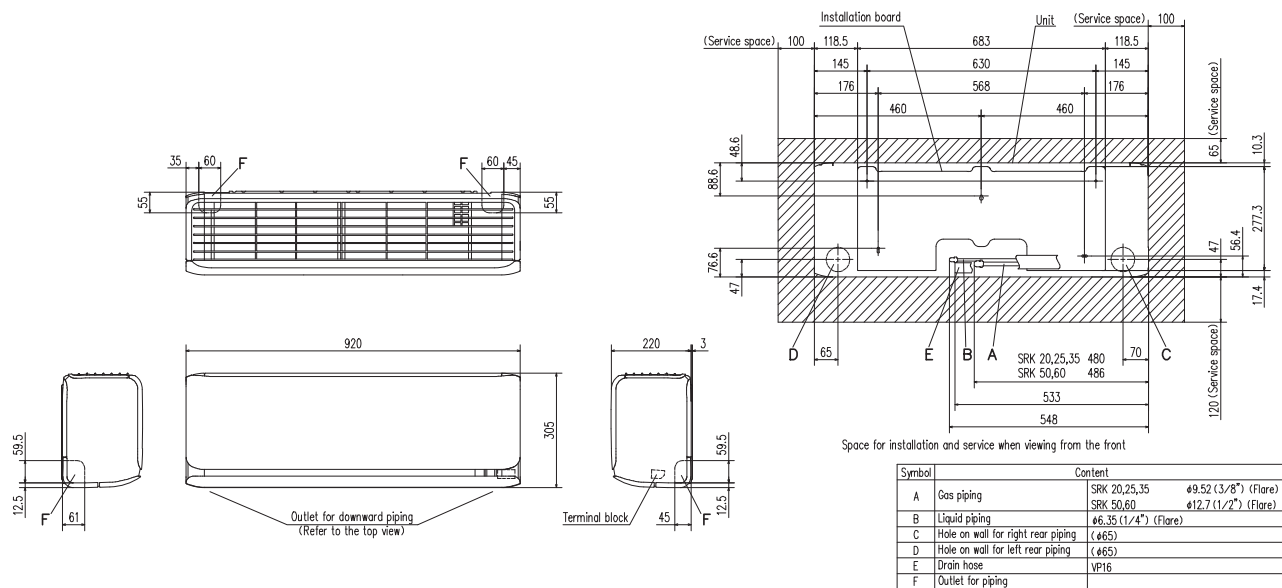

## SRC20ZSX-W Outdoor Unit

