



SRK60ZSX-W

Hyper Inverter Wall Mount



White ZSX-W



Titanium ZSX-WT



Contrast ZSX-WB



SRK-ZSX series can be selected for use on both R32 and R410a outdoor units.



SRK-ZSX series can be selected for use as indoor units in a combination with the SCM Multi system outdoor unit.



Wireless remote control



SRC20ZSX-W, SRC25ZSX-W
SRC35ZSX-W, SRC50ZSX-W
SRC60ZSX-W

FUNCTIONS

Energy saving



Air flow



Clean operation & Filter



Comfort & Convenience



Others


Indoor unit				SRK20ZSX-W-WB-WT	SRK25ZSX-W-WB-WT	SRK35ZSX-W-WB-WT	SRK50ZSX-W-WB-WT	SRK60ZSX-W-WB-WT	
Outdoor unit				SRC20ZSX-W	SRC25ZSX-W	SRC35ZSX-W	SRC50ZSX-W	SRC60ZSX-W	
Power source				1Phase, 220 - 240, 50Hz					
Nominal cooling capacity (Min~Max)			kW	2.0 (0.9~3.4)	2.5 (0.9~3.8)	3.5 (0.9~4.5)	5.0 (1.0~6.2)	6.1 (1.0~6.9)	
Nominal heating capacity (Min~Max)			kW	2.7 (0.8~5.5)	3.2 (0.8~6.0)	4.3 (0.8~6.8)	6.0 (0.8~8.2)	6.8 (0.8~8.8)	
Power consumption	Cooling/Heating	kW		0.31 / 0.47	0.44 / 0.59	0.74 / 0.90	1.24 / 1.36	1.71 / 1.65	
EER/COP	Cooling/Heating			6.45 / 5.74	5.68 / 5.42	4.73 / 4.78	4.03 / 4.41	3.57 / 4.12	
Max. running current			A	9	9	9	15	15	
Sound power level	Indoor	Cooling/Heating	dB(A)	53 / 55	55 / 56	58 / 58	59 / 62	62 / 63	
	Outdoor	Cooling/Heating		56 / 58	57 / 58	61 / 62	63 / 61	65 / 64	
Sound pressure level	Indoor	Cooling (Hi/Me/Lo/Ulo) Heating (Hi/Me/Lo/Ulo)		38 / 31 / 24 / 19 38 / 33 / 25 / 19	39 / 33 / 25 / 19 40 / 34 / 27 / 19	43 / 35 / 26 / 19 42 / 35 / 28 / 19	44 / 39 / 31 / 22 47 / 41 / 33 / 23	48 / 41 / 33 / 22 47 / 42 / 34 / 23	
	Outdoor	Cooling/Heating		43 / 45	44 / 45	48 / 47	51 / 49	52 / 53	
Air flow	Indoor	Cooling (Hi/Me/Lo/Ulo) Heating (Hi/Me/Lo/Ulo)	m³/min	11.3 / 9.1 / 6.0 / 5.0 12.2 / 10.3 / 7.2 / 5.4	12.2 / 10.0 / 6.7 / 5.0 12.8 / 11.0 / 7.8 / 5.4	13.1 / 10.8 / 7.3 / 5.0 13.9 / 11.8 / 8.6 / 5.4	14.3 / 12.4 / 7.8 / 5.4 17.3 / 14.3 / 9.8 / 6.2	16.3 / 13.4 / 8.9 / 5.4 17.8 / 13.7 / 10.9 / 6.2	
	Outdoor	Cooling/Heating		31.0 / 31.0	31.0 / 31.0	36.0 / 31.0	39.0 / 33.0	41.5 / 39.0	
Exterior dimensions	Indoor	HeightxWidthxDepth	mm	305 x 920 x 220					
	Outdoor			640 x 800(+71) x 290					
Net weight	Indoor / Outdoor	kg	13.0 / 43.0					13.0 / 45.0	
Refrigerant	Type/GWP	R32 / 675							
	Charge	kg/TOE/eq	1.20 / 0.810					1.30 / 0.878	
Refrigerant piping size	Liquid/Gas	ø mm	6.35(1/4") / 9.52(3/8")					6.35(1/4") / 12.7(1/2")	
Refrigerant line (one way)	length	m	Max.25					Max.30	
Vertical height differences	Outdoor is higher/lower	m	Max.15 / Max.15					Max.20 / Max.20	
Outdoor operating temperature range	Cooling	°C	-15~46						
	Heating		-20~24						
Clean filter				Allergen Clear Filter x 1, Photocatalytic Washable Deodorizing Filter x 1					



SRK60ZSX-W

Hyper Inverter Wall Mount

SRK60ZSX-W Indoor Unit

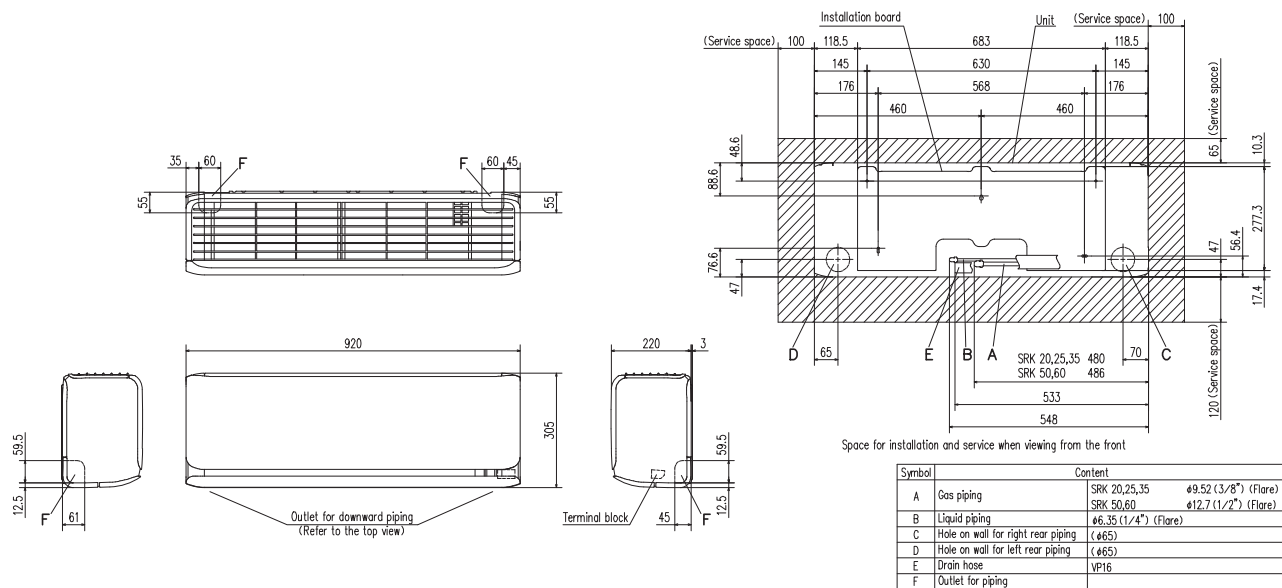

SRC60ZSX-W Outdoor Unit

