




SRR25ZM-S

Hyper Inverter Slim Ducted

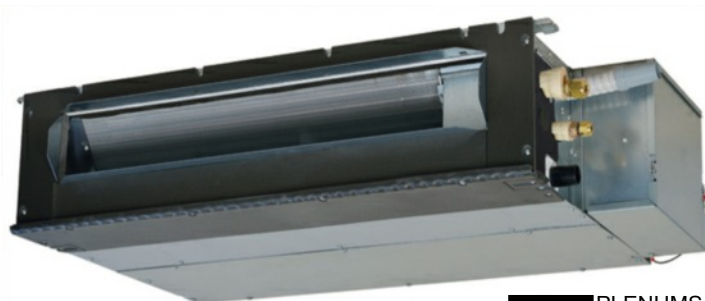

PLENUMS AVAILABLE




SRR-ZM series can be selected for use as indoor units in the combination with SCM Multi system outdoor unit.



Thin design

The height of all SRR models is only 200mm

Bottom air inlet kit (option)

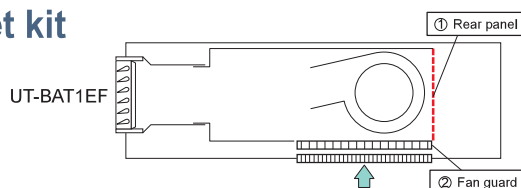

FUNCTIONS

Energy saving Clean operation & Filter



Comfort & Convenience



Others



Wireless remote control



SRC25ZMX-S, SRC35ZMX-S

SPECIFICATIONS


Indoor unit				SRR25ZM-S	SRR35ZM-S
Outdoor unit				SRC25ZMX-S	SRC35ZMX-S
Power source				1 Phase, 220 - 240V, 50Hz	
Nominal cooling capacity (Min~Max)			kW	2.5 (1.0 ~ 3.3)	3.5 (1.0 ~ 3.9)
Nominal heating capacity (Min~Max)			kW	3.4 (1.4 ~ 4.8)	4.2 (1.5 ~ 5.2)
Power consumption		Cooling/Heating	kW	0.570 / 0.750	0.980 / 1.030
EER/COP		Cooling/Heating		4.39 / 4.53	3.57 / 4.08
Inrush current		220/230/240 V	A	3.9 / 3.7 / 3.6	5.0 / 4.8 / 4.6
Max. running current				8	8
Sound power level	Indoor	Cooling/Heating	dB(A)	56 / 59	57 / 60
	Outdoor	Cooling/Heating		60 / 60	62 / 62
Sound pressure level	Indoor	Cooling (Hi/Me/Lo/Ulo)		37 / 33 / 30 / 24	38 / 34 / 31 / 25
		Heating (Hi/Me/Lo/Ulo)		40 / 37 / 34 / 28	41 / 38 / 35 / 29
Air flow	Indoor	Cooling/Heating		47 / 47	50 / 50
		Cooling (Hi/Me/Lo/Ulo)	m³/min	9.5 / 8.0 / 6.5 / 4.5	10.0 / 8.5 / 7.0 / 5.0
	Heating (Hi/Me/Lo/Ulo)	10.0 / 9.0 / 8.0 / 6.0		10.5 / 9.5 / 8.5 / 6.5	
	Outdoor	Cooling/Heating		29.5 / 27.0	32.5 / 29.5
Exterior dimensions	Indoor	HeightxWidthxDepth	mm	200 x 750 x 500	
	Outdoor			595 x 780(+62) x 290	
Net weight	Indoor / Outdoor		kg	20.5 / 35	
Refrigerant	Type/GWP			R410A / 2088	
	Charge		kg/TCO:Eq	1.2 / 2.506	
Refrigerant piping size	Liquid/Gas		ø mm	6.35(1/4") / 9.52(3/8")	
Refrigerant line (one way) length			m	Max. 15	
Vertical height differences			m	Max. 10 / Max.10	
Outdoor operating temperature range	Cooling		°C	-15~46	
	Heating			-15~24	
Bottom air inlet kit (option)				UT-BAT1EF	




SRR25ZM-S

Hyper Inverter Slim Ducted

SRR25ZM-S Indoor Unit

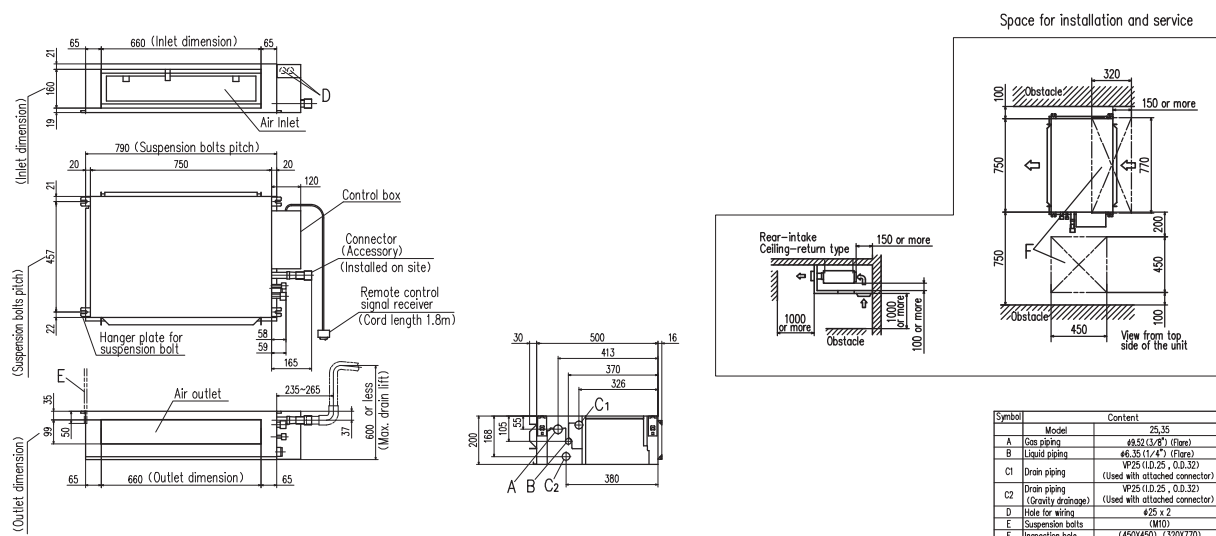

SRC25ZMX-S Outdoor Unit

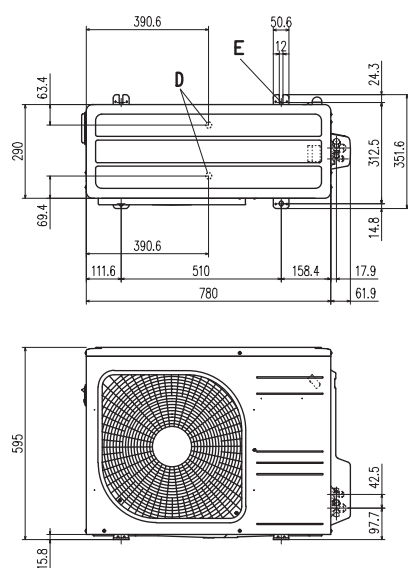

Symbol	Content	
A	Service valve connection (gas side)	ZMX: $\phi 9.52(3/8")$ (flare) ZS ZMP: $\phi 12.7(1/2")$ (flare)
B	Service valve connection (liquid side)	$\phi 6.35(1/4")$ (Flare)
C	Pipe/cable draw-out hole	
D	Drain discharge hole	$\phi 20 \times 2$ places
F	Anchor bolt hole	$M10 \times 4$ places

Examples of installation Dimensions	I	II	III	IV
L1	Open	280	280	180
L2	100	75	Open	Open
L3	100	80	80	80
L4	250	Open	250	Open

