




## SRR35ZM-S

Hyper Inverter Slim Ducted

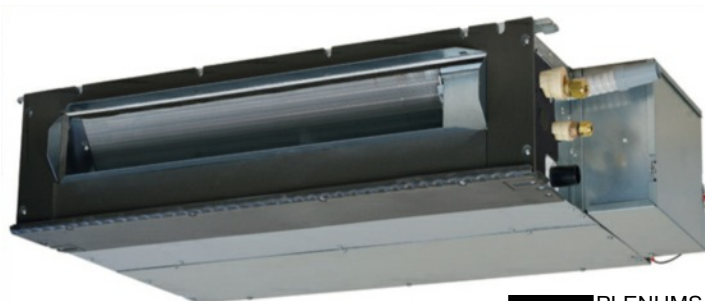

PLENUMS AVAILABLE




SRR-ZM series can be selected for use as indoor units in the combination with SCM Multi system outdoor unit.



### Thin design

The height of all SRR models is only 200mm

### Bottom air inlet kit (option)

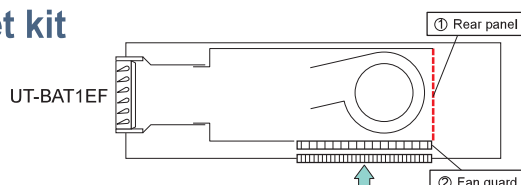

Wireless remote control



SRC25ZMX-S, SRC35ZMX-S

### FUNCTIONS

Energy saving Clean operation & Filter



Comfort & Convenience



Others



### SPECIFICATIONS


| Indoor unit                         |         |                         |           | SRR25ZM-S                 | SRR35ZM-S              |
|-------------------------------------|---------|-------------------------|-----------|---------------------------|------------------------|
| Outdoor unit                        |         |                         |           | SRC25ZMX-S                | SRC35ZMX-S             |
| Power source                        |         |                         |           | 1 Phase, 220 - 240V, 50Hz |                        |
| Nominal cooling capacity (Min~Max)  |         | kW                      |           | 2.5 (1.0 ~ 3.3)           | 3.5 (1.0 ~ 3.9)        |
| Nominal heating capacity (Min~Max)  |         | kW                      |           | 3.4 (1.4 ~ 4.8)           | 4.2 (1.5 ~ 5.2)        |
| Power consumption                   |         | Cooling/Heating         | kW        | 0.570 / 0.750             | 0.980 / 1.030          |
| EER/COP                             |         | Cooling/Heating         |           | 4.39 / 4.53               | 3.57 / 4.08            |
| Inrush current                      |         | 220/230/240 V           | A         | 3.9 / 3.7 / 3.6           | 5.0 / 4.8 / 4.6        |
| Max. running current                |         |                         |           | 8                         | 8                      |
| Sound power level                   | Indoor  | Cooling/Heating         |           | 56 / 59                   | 57 / 60                |
|                                     | Outdoor | Cooling/Heating         |           | 60 / 60                   | 62 / 62                |
| Sound pressure level                | Indoor  | Cooling (Hi/Me/Lo/Ulo)  | dB(A)     | 37 / 33 / 30 / 24         | 38 / 34 / 31 / 25      |
|                                     | Indoor  | Heating (Hi/Me/Lo/Ulo)  |           | 40 / 37 / 34 / 28         | 41 / 38 / 35 / 29      |
| Air flow                            | Outdoor | Cooling/Heating         |           | 47 / 47                   | 50 / 50                |
|                                     | Indoor  | Cooling (Hi/Me/Lo/Ulo)  | m³/min    | 9.5 / 8.0 / 6.5 / 4.5     | 10.0 / 8.5 / 7.0 / 5.0 |
|                                     | Indoor  | Heating (Hi/Me/Lo/Ulo)  |           | 10.0 / 9.0 / 8.0 / 6.0    | 10.5 / 9.5 / 8.5 / 6.5 |
| Exterior dimensions                 | Outdoor | HeightxWidthxDepth      | mm        | 200 x 750 x 500           |                        |
|                                     | Indoor  | HeightxWidthxDepth      | mm        | 595 x 780(+62) x 290      |                        |
| Net weight                          |         | Indoor / Outdoor        | kg        | 20.5 / 35                 |                        |
| Refrigerant                         |         | Type/GWP                |           | R410A / 2088              |                        |
| Refrigerant piping size             |         | Charge                  | kg/TCO:Eq | 1.2 / 2.506               |                        |
| Refrigerant line (one way) length   |         | Liquid/Gas              | ø mm      | 6.35(1/4") / 9.52(3/8")   |                        |
| Vertical height differences         |         | Outdoor is higher/lower | m         | Max. 15                   |                        |
| Outdoor operating temperature range |         | Cooling                 | °C        | Max. 10 / Max.10          |                        |
|                                     |         | Heating                 | °C        | -15~46                    |                        |
| Bottom air inlet kit (option)       |         |                         |           | -15~24                    |                        |
|                                     |         |                         |           | UT-BAT1EF                 |                        |



## SRR35ZM-S

Hyper Inverter Slim Ducted

### SRR35ZM-S Indoor Unit

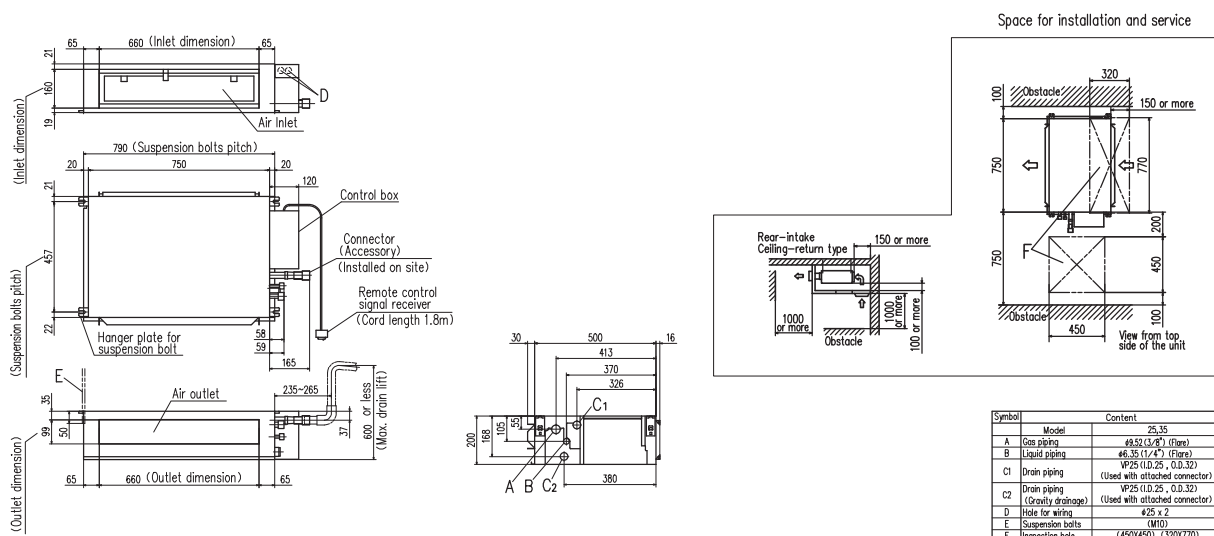

### SRC35ZMX-S Outdoor Unit

