



FDUM71VF1

Standard Inverter Ducted




Thin Design

The height of all FDUM models is only 280mm

70mm less


H 350
H 280



FDUM100/125/140VF

19mm less

H 299
H 280



FDUM40/50/60/71VF

Wired remote control (option)



RC-EX3



RC-E5



RCH-E3

Wireless remote control (option)



RCN-KIT4-E2



RCN-KIT4-E2

Filter Kit (option)



UM-FL1EF : for 40, 50
UM-FL2EF : for 60, 71
UM-FL3EF : for 100, 125, 140

FUNCTIONS

Energy saving

Clean operation & Filter



Comfort & Convenience



Others



SPECIFICATIONS


			Standard Inverter		
Set model name			FDUM71VNPVF1	FDUM90VNPVF2	FDUM100VNP1VF2
Indoor unit			FDUM71VF1	FDUM100VF2	FDUM100VF2
Outdoor unit			FDC71VNP	FDC90VNP	FDC100VNP
Power source			1 Phase 220-240V, 50Hz / 220V, 60Hz		
Nominal cooling capacity (Min~Max)			kW 7.1 (1.4 ~ 7.1)	9.0 (1.9 ~ 9.0)	10.0 (2.8 ~ 11.2)
Nominal heating capacity (Min~Max)			kW 7.1 (1.0 ~ 7.1)	9.0 (1.5 ~ 9.0)	11.2 (2.5 ~ 12.5)
Power consumption	Cooling/Heating	kW	2.63 / 1.96	2.65 / 2.25	3.00 / 2.93
EER/COP	Cooling/Heating		2.70 / 3.62	3.40 / 4.00	3.33 / 3.82
Inrush current		A	5	5	5
Max. current			14.5	18.0	22.0
Sound power level*1	Indoor	Cooling/Heating	dB(A)	65 / 65	65 / 65
	Outdoor	Cooling/Heating		67 / 67	69 / 69
Sound pressure level*1 ※2	Indoor	Cooling (Hi/Me/Lo)		33 / 29 / 25	38 / 36 / 30
		Heating (Hi/Me/Lo)		33 / 29 / 25	38 / 36 / 30
	Outdoor	Cooling/Heating		54 / 54	57 / 55
		Cooling (Hi/Me/Lo)		19 / 15 / 10	28 / 25 / 19
Air flow ※2	Indoor	Heating (Hi/Me/Lo)	m³/min	19 / 15 / 10	28 / 25 / 19
		Cooling/Heating		36 / 36	63 / 49.5
	Outdoor	Cooling/Heating			75 / 79
External static pressure*3			Pa	Standard:35 Max:200	Standard:60 Max:100
Exterior dimensions	Indoor	HeightxWidthxDepth	mm	280 x 950 x 635	280 x 1,370 x 740
	Outdoor			640 x 800(+71) x 290	750 x 880(+88) x 340
Net weight	Indoor		kg	34	54
	Outdoor			45	57
Ref.piping size	Liquid/Gas	ømm	6.35(1/4") / 12.7(1/2")	6.35(1/4") / 15.88(5/8")	9.52(3/8") / 15.88(5/8")
Refrigerant line (one way) length			m	Max.30	
Vertical height differences			Outdoor is higher/lower	m	Max.20 / Max.20
Outdoor operating temperature range	Cooling	°C		-15~46*4	
	Heating			-15~20	
Air filter			Filter kit : UM-FL2EF / UM-FL3EF (option)		
Remote control (option)			wired:RC-EX3, RC-E5, RCH-E3 wireless:RCN-KIT4-E2		



FDUM71VF1



Standard Inverter Ducted

FDUM71VF1 Indoor Unit

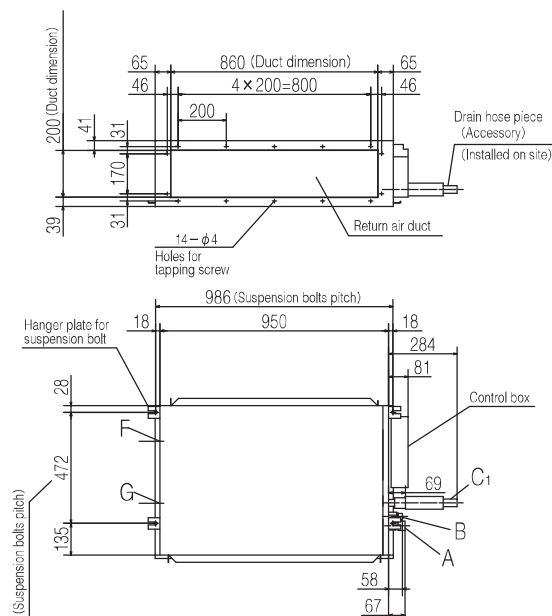


Symbol	Content
A	Gas piping $\phi 15.88(5/8")$ (Flare)
B	Liquid piping $\phi 9.52(3/8")$ (Flare)
C1	Drain piping VP20 (standard I.D.20, O.D.26) or VP25 (Used with attached socket I.D.25, O.D.34) Note (2)
C2	Drain piping (Gravity drainage) VP20 (standard I.D.20, O.D.26) or VP25 (Used with attached socket I.D.25, O.D.34)
D	Hole for wiring
E	Suspension bolts (M10)
F	Outside air opening for ducting ($\phi 150$) (Knock out)
G	Air outlet opening for ducting ($\phi 125$) (Knock out)
H	Inspection hole (450X450)

Notes (1) The model name label is attached on the lid of the control box.
(2) Prepare the connecting socket (VP20 or VP25) on site.

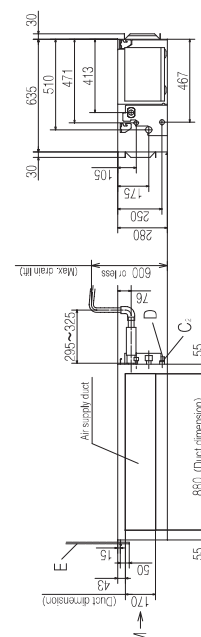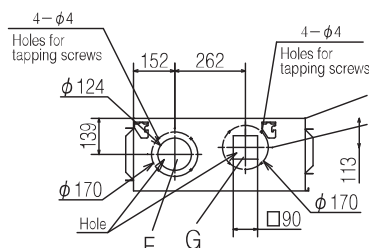



FDC71VNP Outdoor Unit

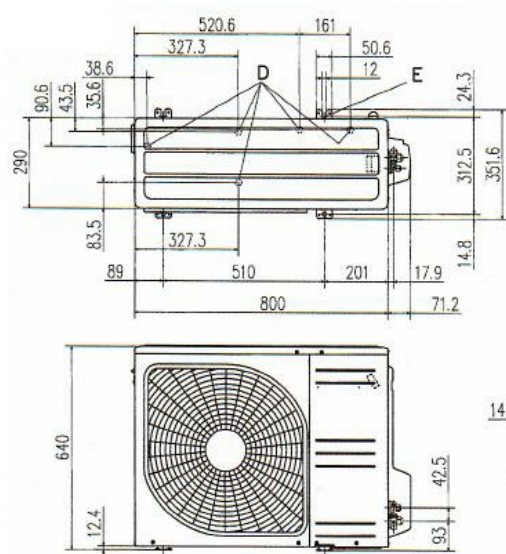

Symbol	Content
A	Service valve connection (gas side) $\phi 12.7$ (1/2") (Flare)
B	Service valve connection (liquid side) $\phi 5.35$ (1/4") (Flare)
C	Pipe/cable draw-out hole
D	Drain discharge hole $\phi 20 \times 5$ places
F	Anchor bolt hole $M10 \times 4$ places

Notes

- (1) It must not be surrounded by walls on the four sides.
- (2) The unit must be fixed with anchor bolts. An anchor bolt must not protrude more than 15mm.
- (3) Where the unit is subject to strong winds, lay it in such a direction that the blower outlet faces perpendicularly to the dominant wind direction.
- (4) Leave 1m or more space above the unit.
- (5) A wall in front of the blower outlet must not exceed the unit's height.
- (6) The model name label is attached on the lower right corner of the front panel.



Minimum installation space

Examples of Installation Dimensions	I	II	III	IV
L1	Open	280	280	180
L2	100	75	Open	Open
L3	100	80	80	80
L4	250	Open	250	Open