




FDU125VF

Hyper Inverter High Static Ducted



Automatic External Static Pressure (ESP)

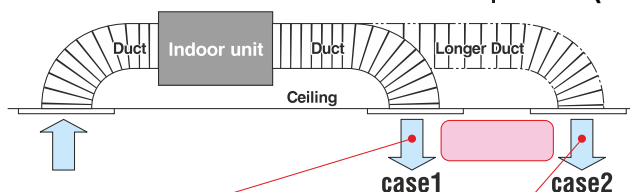

Setting No.	No.8	No.9	No.10	No.11	No.12	No.13	No.14	No.15
E.S.P.	80Pa	90Pa	100Pa	110Pa	120Pa	130Pa	140Pa	150Pa

* Range of 80~150 Pa is set at ex-factory default.
Range of 10~200 Pa is available by setting SW8-4 switch on at site.

<Expansion of
external static pressure range>

Previous 10~130Pa → Current 10~200Pa

Filter Kit (option)



Wireless remote control (option)



RCN-KIT4-E2

Wired remote control (option)



RC-EX3 RC-E5 RCH-E3

FUNCTIONS

Comfort & Convenience



Others

Energy saving

Clean operation

SPECIFICATIONS


			Hyper Inverter			
Set model name			FDU71VNXVF1	FDU100VNXVF2	FDU125VNXVF	FDU140VNXVF
Indoor unit			FDU71VF1	FDU100VF2	FDU125VF	FDU140VF
Outdoor unit			FDC71VNX	FDC100VNX	FDC125VNX	FDC140VNX
Power source			1 Phase 220-240V, 50Hz / 220V, 60Hz			
Nominal cooling capacity (Min~Max)			kW	7.1 (3.2 ~ 8.0)	10.0 (4.0 ~ 11.2)	12.5 (5.0 ~ 14.0)
Nominal heating capacity (Min~Max)			kW	8.0 (3.6 ~ 9.0)	11.2 (4.0 ~ 12.5)	14.0 (4.0 ~ 17.0)
Power consumption			Cooling/Heating	kW	2.05 / 2.01	2.68 / 3.02
EER/COP			Cooling/Heating		3.46 / 3.98	3.73 / 3.71
Inrush current			A	5	5	5
Max. current				17	25	29
Sound power level*1			Indoor	Cooling/Heating	65 / 65	65 / 65
			Outdoor	Cooling/Heating	66 / 66	70 / 70
Sound pressure level*1 *1			Indoor	Cooling (Hi/Me/Lo)	33 / 29 / 25	38 / 36 / 30
			Outdoor	Heating (Hi/Me/Lo)	33 / 29 / 25	38 / 36 / 30
			Indoor	Cooling/Heating	51 / 48	48 / 50
			Outdoor	Cooling (Hi/Me/Lo)	19 / 15 / 10	28 / 25 / 19
			Indoor	Heating (Hi/Me/Lo)	19 / 15 / 10	28 / 25 / 19
			Outdoor	Cooling/Heating	60 / 50	100 / 100
External static pressure*2			Pa	Standard:35 Max:200	Standard:60 Max:200	Standard:60 Max:200
Exterior dimensions			Indoor	HeightxWidthxDepth	mm	280 x 950 x 635
			Outdoor			750 x 880(+88) x 340
Net weight			Indoor	kg		34
			Outdoor			60
Ref.piping size			Liquid/Gas	ømm		9.52(3/8") / 15.88(5/8")
Refrigerant line (one way) length			m	Max.50		Max.100
Vertical height differences			Outdoor is higher/lower	m		Max.30 / Max.15
Outdoor operating temperature range			Cooling	°C		-15~43*3
			Heating			-20~20
Air filter						Procure locally
Remote control (option)						wired:RC-EX3, RC-E5, RCH-E3 wireless:RCN-KIT4-E2



FDU125VF

Hyper Inverter High Static Ducted

FDU125VF Indoor Unit

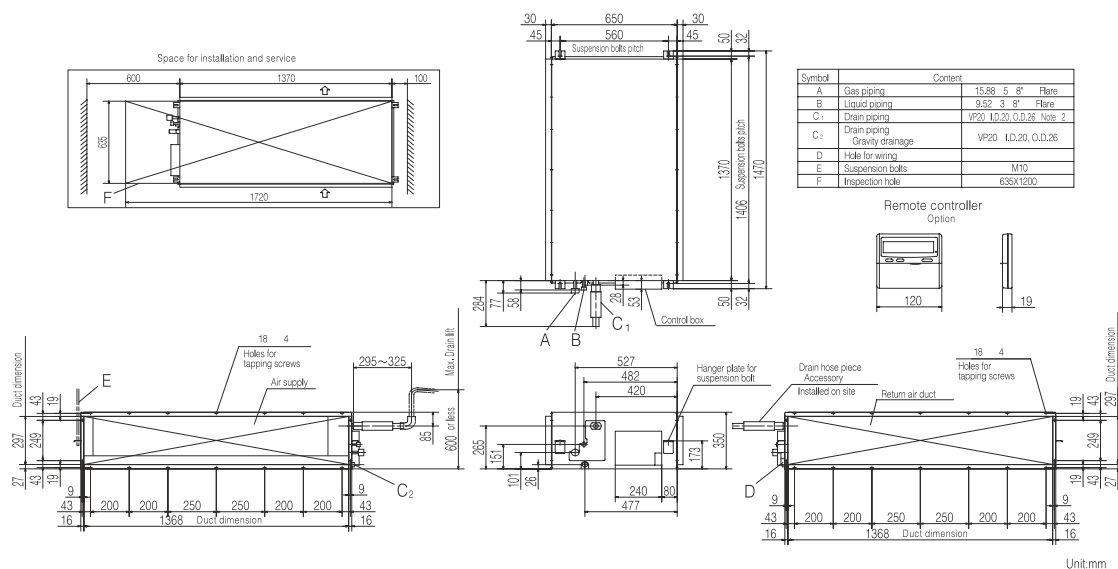

- Notes
- The model name label is attached on the lid of the control box.
 - Prepare the connecting socket VP20 on site.

FDC125VNX Outdoor Unit

