



SKM20ZSP-S

2.0kW




Specifications

Nominal cooling capacity		kW	2.0
Nominal heating capacity		kW	3.0
Sound power level	Cooling	dB(A)	58
	Heating	dB(A)	56
Sound pressure level	Cooling(Hi/Me/Lo/Ulo)	dB(A)	42 / 35 / 24
	Heating(Hi/Me/Lo/Ulo)	dB(A)	41 / 35 / 27
Air flow	Cooling(Hi/Me/Lo/Ulo)	m ³ /min	8.5 / 7.0 / 5.0
	Heating(Hi/Me/Lo/Ulo)	m ³ /min	8.0 / 7.0 / 5.5
Exterior dimensions (H×W×D)		mm	262×769×210
Net weight		kg	7.6
Refrigerant piping size	Liquid / Gas	mm ø	6.35(1/4")/9.52(3/8")
Clean filter			-

- The data is measured under the following conditions(ISO-T1, H1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
- Sound level the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

Schematics

SKM20ZSP-S SKM25ZSP-S SKM35ZSP-S

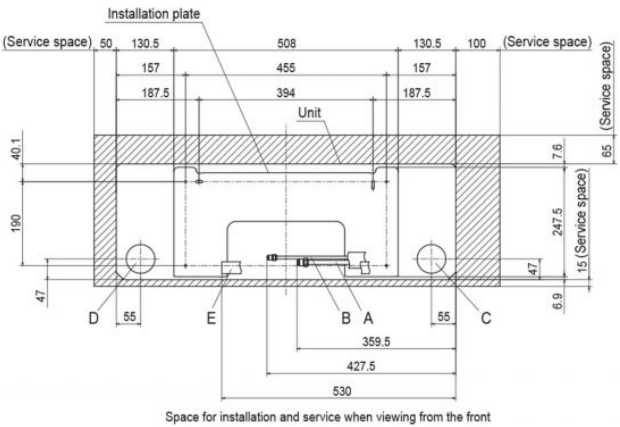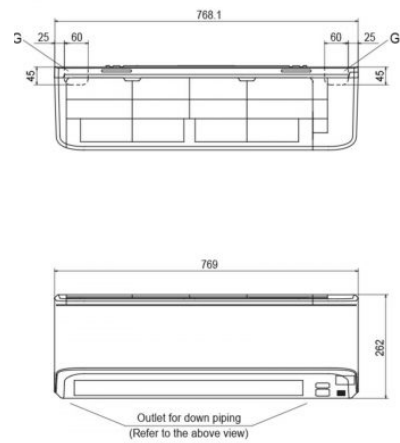

Symbol	Content
A	Gas piping
B	Liquid piping
C	Hole on wall for right rear piping
D	Hole on wall for left rear piping
E	Drain hose
F	Outlet for wiring
G	Outlet for piping (on both side)