MITSUBISHI HEAVY INDUSTRIES
AIR CONDITIONING EUROPE

# SRK35ZS-S

## 3.5kW

## Specifications

| | | | |
|---|---|---|---|
| Nominal cooling capacity | | kW | 3.5 |
| Nominal heating capacity | | kW | 4.5 |
| Sound power level | Cooling | dB(A) | 56 |
| | Heating | dB(A) | 58 |
| Sound pressure level | Cooling(Hi/Me/Lo/Ulo) | dB(A) | 40 / 30 / 26 / 19 |
| | Heating(Hi/Me/Lo/Ulo) | dB(A) | 41 / 36 / 25 / 19 |
| Air flow | Cooling(Hi/Me/Lo/Ulo) | $m^3$/min | 11.3 / 8.7 / 7.0 / 5.0 |
| | Heating(Hi/Me/Lo/Ulo) | $m^3$/min | 12.3 / 11.0 / 7.0 / 5.9 |
| Exterior dimensions (H×W×D) | | mm | 290×870×230 |
| Net weight | | kg | 9.5 |
| Refrigerant piping size | Liquid / Gas | mm ø | 6.35(1/4") / 9.52(3/8") |
| Clean filter | | | Allergen Clear Filter × 1, Photocatalytic Washable Deodorizing Filter × 1 |

• The data is measured under the following conditions(ISO-T1, H1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
• Sound level the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

Because of our policy of continuous improvement, we reserve the right to make changes in all specifications without notice.

## Schematics

**SRK20ZS-W,-WB,-WT SRK25ZS-W,-WB,-WT**
**SRK35ZS-W,-WB,-WT SRK50ZS-W,-WB,-WT**
**SRK20ZS-S,-SB,-ST SRK25ZS-S,-SB,-ST**
**SRK35ZS-S,-SB,-ST SRK50ZS-S,-SB,-ST**

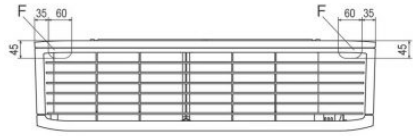


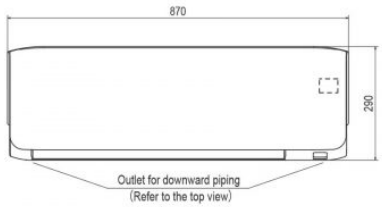





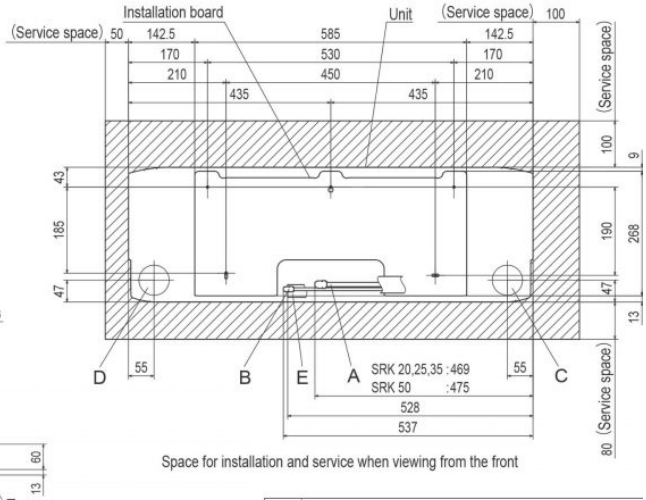


| Symbol | Content | | |
|---|---|---|---|
| A | Gas piping | SRK20, 25, 35 | φ9.52 (3/8") (Flare) |
| | | SRK50 | φ12.7 (1/2") (Flare) |
| B | Liquid piping | φ6.35 (1/4") (Flare) | |
| C | Hole on wall for right rear piping | (φ65) | |
| D | Hole on wall for left rear piping | (φ65) | |
| E | Drain hose | VP16 | |
| F | Outlet for piping (on both side) | | |

Because of our policy of continuous improvement, we reserve the right to make changes in all specifications without notice.