



SRK25ZSX-WB

2.5kW



Specifications

Nominal cooling capacity		kW	2.5
Nominal heating capacity		kW	3.4
Sound power level	Cooling	dB(A)	55
	Heating	dB(A)	56
Sound pressure level	Cooling(Hi/Me/Lo/Ulo)	dB(A)	39 / 33 / 25 / 19
	Heating(Hi/Me/Lo/Ulo)	dB(A)	40 / 34 / 27 / 19
Air flow	Cooling(Hi/Me/Lo/Ulo)	m ³ /min	12.2 / 10.0 / 6.7 / 5.0
	Heating(Hi/Me/Lo/Ulo)	m ³ /min	12.8 / 11.0 / 7.8 / 5.4
Exterior dimensions (H×W×D)		mm	305×920×220
Net weight		kg	13.0
Refrigerant piping size	Liquid / Gas	mm ø	6.35(1/4") / 9.52(3/8")
Clean filter		Allergen Clear Filter x1, Photocatalytic Washable Deodorizing Filterx1	

- The data is measured under the following conditions(ISO-T1, H1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
- Sound level the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

Schematics

SRK20ZSX-W, -WB, -WT SRK25ZSX-W, -WB, -WT
SRK35ZSX-W, -WB, -WT SRK50ZSX-W, -WB, -WT
SRK60ZSX-W, -WB, -WT

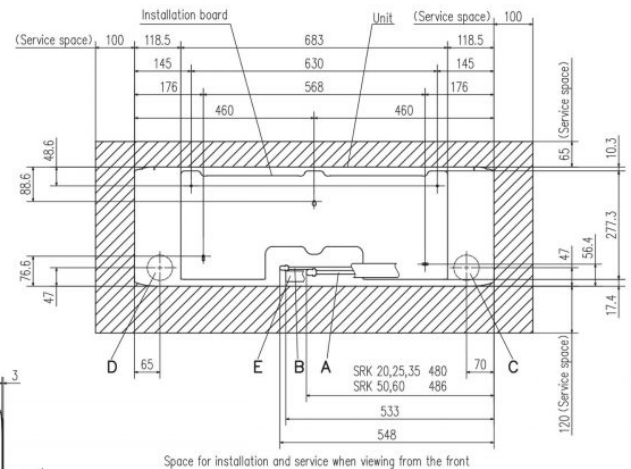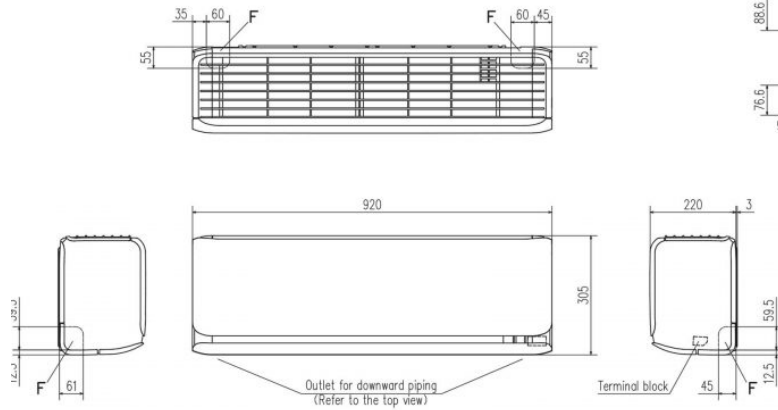

Space for installation and service when viewing from the front

Symbol	Content
A	Gas piping SRK 20,25,35 $\phi 9.52$ (3/8") (Flare) SRK 50,60 $\phi 12.7$ (1/2") (Flare)
B	Liquid piping SRK 20,25,35 $\phi 6.35$ (1/4") (Flare) SRK 50,60 $\phi 12.7$ (1/2") (Flare)
C	Hole on wall for right rear piping ($\phi 65$)
D	Hole on wall for left rear piping ($\phi 65$)
E	Drain hose VP16
F	Outlet for piping