

ENERGY EFFICIENCY

A+++ / A+

Perfect solution for multiple rooms

Energy Efficiency | Extreme Durable | Comfortable

LG's Multi Split system provides highly efficient cooling and heating with two, three, four, or **up to nine indoor units** operating from a single outdoor unit. LG's advanced inverter technology offers powerful performance while consuming less energy and floor space than that of individual single split systems.


World Class
High Efficiency



SEER / SCOP class (ErP regulation)

kW	4.1	4.7	5.3	6.2	7.0	7.9	8.8
SEER	8.5 A+++	7.8 A++	8.5 A+++	8.5 A+++	8.0 A++	8.0 A++	8.2 A++
SCOP	4.2 A+	4.2 A+	4.4 A+	4.4 A+	4.4 A+	4.2 A+	4.2 A+

- BLDC Inverter Twin Rotary Compressor
- Enhanced Heat Exchanger
- Smart Load Control
- Peak Current Control






Note: this picture is for illustration purpose only. It is not accurate.

MU2R15
MU2R17



EUROVENT
CERTIFIED
PERFORMANCE

38

OUTDOOR UNIT

MU3R19

MU3R21

MU4R25


(Unit : mm)



LG participates in the ECP programme for EUROVENT AC program.

Check ongoing validity of certification

: www.eurovent-certification.com

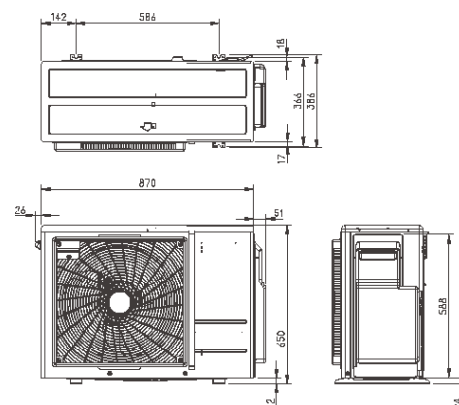

OUTDOOR UNIT				MU3R19.U21	MU3R21.U21	MU4R25.U21
Compressor	Type			Twin Rotary		
Capacity *	Cooling	Min / Nom / Max	kW	1.1 / 5.3 / 6.3	1.1 / 6.2 / 7.3	1.1 / 7.0 / 8.5
	Heating	Min / Nom / Max	kW	1.2 / 6.3 / 7.3	1.2 / 7.0 / 7.8	1.2 / 8.1 / 9.1
Low Temperature Capacity	Heating -7°C	Max	kW	5.2	5.5	5.9
Power Input *	Cooling	Min / Nom / Max	kW	0.3 / 1.1 / 2.0	0.3 / 1.4 / 2.5	0.3 / 1.8 / 2.8
	Heating	Min / Nom / Max	kW	0.3 / 1.3 / 2.0	0.3 / 1.5 / 2.4	0.3 / 1.8 / 2.9
Running Current	Cooling	Min / Nom / Max	A	1.3 / 5.0 / 9.2	1.3 / 6.5 / 11.1	1.3 / 8.0 / 12.6
	Heating	Min / Nom / Max	A	1.3 / 5.7 / 9.2	1.3 / 6.9 / 10.8	1.3 / 8.3 / 12.9
EER				4.75	4.28	4.00
COP				5.00	4.60	4.40
SEER				8.50	8.50	8.00
SCOP				4.40	4.40	4.40
Pdesign (@-10°C)				5.20	5.20	5.40
Seasonal Energy Label	Cooling / Heating (A+++ to D Scale)			A+++ / A+	A+++ / A+	A++ / A+
Annual Energy Consumption	Cooling / Heating			217 / 1,655	253 / 1,655	308 / 1,718
Airflow Rate	Nom			50	50	50
Sound Pressure	Cooling	Nom	dB(A)	48	49	50
	Heating	Nom	dB(A)	53	54	54
Sound Power	Cooling	Max	dB(A)	63	64	66
Dimensions	W x H x D			870 x 650 x 330	870 x 650 x 330	870 x 650 x 330
Net Weight				46	46	46.2
Refrigerant	Type			R32	R32	R32
	Charge			1.4	1.4	1.4
	Additional Charge			20	20	20
	GWVP			675	675	675
	t-CO ₂ eq			0.945	0.945	0.945
Operation Range (Outdoor)	Cooling	Min / Max	°C DB	-10 ~ 48	-10 ~ 48	-10 ~ 48
	Heating	Min / Max	°C WB	-18 ~ 18	-18 ~ 18	-18 ~ 18
Power Supply	V, Ø, Hz			1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
Power Supply Cable	No. x mm ²			3C x 2.5	3C x 2.5	3C x 2.5
Transmission Cable	No. x mm ²			4C x 0.75	4C x 0.75	4C x 0.75
Circuit Breaker	A			20	20	20
Piping Length Total	m			50	50	70
Piping Length per Branch	Max			25	25	25
Piping Elevation Difference	IDU - ODU	Max	m	15	15	15
	IDU - IDU	Max	m	7.5	7.5	7.5
Piping Connection	Liquid	mm(inch) x No.		Ø 6.35 (1/4) x 3	Ø 6.35 (1/4) x 3	Ø 6.35 (1/4) x 4
	Gas	mm(inch) x No.		Ø 9.52 (3/8) x 3	Ø 9.52 (3/8) x 3	Ø 9.52 (3/8) x 4


OUTDOOR UNIT

MU4R27
MU5R30

(Unit : mm)



LG participates in the ECP programme for EUROVENT AC program.
Check ongoing validity of certification
: www.eurovent-certification.com

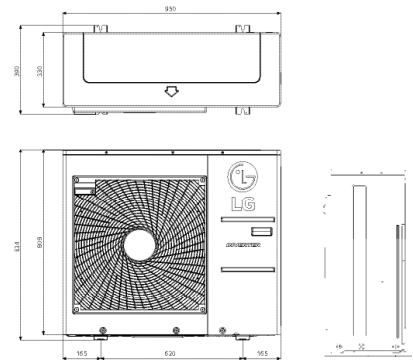

OUTDOOR UNIT				MU4R27.U40	MU5R30.U40
Compressor	Type			Twin Rotary	Twin Rotary
Capacity *	Cooling	Min / Nom / Max	kW	1.3 / 7.9 / 9.5	1.3 / 8.8 / 10.6
	Heating	Min / Nom / Max	kW	1.5 / 9.1 / 10.6	1.5 / 10.1 / 12.1
Low Temperature Capacity	Heating -7°C	Max	kW	6.4	7.1
Power Input *	Cooling	Min / Nom / Max	kW	0.4 / 1.8 / 2.9	0.4 / 2.0 / 3.4
	Heating	Min / Nom / Max	kW	0.6 / 2.1 / 3.4	0.6 / 2.2 / 3.6
Running Current	Cooling	Min / Nom / Max	A	1.9 / 8.1 / 13.1	1.9 / 9.1 / 15.2
	Heating	Min / Nom / Max	A	2.8 / 9.4 / 15.3	2.8 / 9.7 / 16.3
EER				4.39	4.40
COP				4.39	4.70
SEER				8.00	8.20
SCOP				4.20	4.20
Pdesign (@-10°C)	kW			7.00	7.40
Seasonal Energy Label	Cooling / Heating (A+++ to D Scale)			A++ / A+	A++ / A+
Annual Energy Consumption	Cooling / Heating			346 / 2,333	376 / 2,467
Airflow Rate	Nom			m ³ /min	60
Sound Pressure	Cooling	Nom	dB(A)	50	50
	Heating	Nom	dB(A)	54	54
Sound Power	Cooling	Max	dB(A)	65	66
Dimensions	W x H x D			mm	950 x 834 x 330
Net Weight				Kg	61
Refrigerant	Type			R32	R32
	Charge			Kg	2.3
	Additional Charge			g/m	20
	GWP			675	675
Operation Range (Outdoor)	t-CO ₂ eq			1.55	1.76
	Cooling	Min / Max	°C DB	-10 / 48	-10 / 48
	Heating	Min / Max	°C WB	-18 / 18	-18 / 18
Power Supply	V, Ø, Hz			220-240, 1, 50	220-240, 1, 50
Power Supply Cable	No. x mm ²			3C x 2.5	3C x 2.5
Transmission Cable	No. x mm ²			4C x 0.75	4C x 0.75
Circuit Breaker	A			25	25
Piping Length Total	m			70	75
Piping Length per Branch	Max			25	25
Piping Elevation Difference	IDU - ODU	Max	m	15	15
	IDU - IDU	Max	m	7.5	7.5
Piping Connection	Liquid	mm(inch) x No.		Ø6.35 (1/4) x 4	Ø6.35 (1/4) x 5
	Gas	mm(inch) x No.		Ø9.52 (3/8) x 4	Ø9.52 (3/8) x 5