



SINGLE-SPLIT WALL MOUNTED TYPE



SRK-ZSX-WF

New!



SRK20ZSX-WF, SRK25ZSX-WF, SRK35ZSX-WF
SRK50ZSX-WF, SRK60ZSX-WF

Pure White(-WF)



Black & White(-WFB)



Titanium(-WFT)



**BUILT IN
WIRELESS LAN**



Wireless
remote control



SRC20ZSX-W, SRC25ZSX-W,
SRC35ZSX-W, SRC50ZSX-W2,
SRC60ZSX-W1

KEY FEATURES

- ZSX series with the "Elegant Timeless Design" is best suited for small to medium sized living spaces.
- High Seasonal efficiency performance is up to A+++ in cooling and heating.
- Low Global Warming Potential (GWP) and High energy efficiency by new refrigerant R32.
- Quiet Air Flow & Long Reach is achieved by jet technology.
- Colour variation available. Users can choose from three different choices.
- Wireless interface control included.

SPECIFICATIONS

Indoor unit				SRK20ZSX-WF-WFB-WFT	SRK25ZSX-WF-WFB-WFT	SRK35ZSX-WF-WFB-WFT	SRK50ZSX-WF-WFB-WFT	SRK60ZSX-WF-WFB-WFT	
Outdoor unit				SRC20ZSX-W	SRC25ZSX-W	SRC35ZSX-W	SRC50ZSX-W2	SRC60ZSX-W1	
Power source				1Phase, 220 - 240V, 50Hz					
Nominal cooling capacity (Min~Max)			kW	2.0 (0.9~3.4)	2.5 (0.9~3.8)	3.5 (0.9~4.5)	5.0 (1.0~6.2)	6.1 (1.0~6.9)	
Nominal heating capacity (Min~Max)			kW	2.7 (0.8~5.5)	3.2 (0.8~6.0)	4.3 (0.8~6.8)	6.0 (0.8~8.2)	6.8 (0.8~8.8)	
Power consumption		Cooling/Heating	kW	0.31 / 0.47	0.44 / 0.59	0.74 / 0.90	1.24 / 1.36	1.71 / 1.65	
EER/COP		Cooling/Heating		6.45 / 5.74	5.68 / 5.42	4.73 / 4.78	4.03 / 4.41	3.57 / 4.12	
Max. running current			A	9	9	9	15	15	
Sound power level	Indoor	Cooling/Heating	dB(A)	53 / 55	55 / 56	58 / 58	59 / 62	62 / 63	
	Outdoor	Cooling/Heating		56 / 58	57 / 58	61 / 62	63 / 61	65 / 64	
Sound pressure level	Indoor	Cooling (Hi/Me/Lo/Ulo)		38 / 31 / 24 / 19	39 / 33 / 25 / 19	43 / 35 / 26 / 19	44 / 39 / 31 / 22	48 / 41 / 33 / 22	
	Indoor	Heating (Hi/Me/Lo/Ulo)		38 / 33 / 25 / 19	40 / 34 / 27 / 19	42 / 35 / 28 / 19	47 / 41 / 33 / 23	47 / 42 / 34 / 23	
Air flow	Outdoor	Cooling/Heating		43 / 45	44 / 45	48 / 47	51 / 49	52 / 53	
	Indoor	Cooling (Hi/Me/Lo/Ulo)		11.3 / 9.1 / 6.0 / 5.0	12.2 / 10.0 / 6.7 / 5.0	13.1 / 10.8 / 7.3 / 5.0	14.3 / 12.4 / 7.8 / 5.4	16.3 / 13.4 / 8.9 / 5.4	
		Heating (Hi/Me/Lo/Ulo)	12.2 / 10.3 / 7.2 / 5.4	12.8 / 11.0 / 7.8 / 5.4	13.9 / 11.8 / 8.6 / 5.4	17.3 / 14.3 / 9.8 / 6.2	17.8 / 13.7 / 10.9 / 6.2		
			Outdoor	Cooling/Heating	31.0 / 31.0	31.0 / 31.0	36.0 / 31.0	39.0 / 33.0	41.5 / 39.0
Exterior dimensions	Indoor	HeightxWidthxDepth	mm	305 x 920 x 220					
	Outdoor			640 x 800(+71) x 290					
Net weight		Indoor / Outdoor	kg	13.0 / 43.0			13.0 / 45.0		
Refrigerant		Type/GWP		R32 / 675					
		Charge	kg/TOC/Eq	1.20 / 0.810			1.30 / 0.878		
Refrigerant piping size		Liquid/Gas	ø mm	6.35(1/4") / 9.52(3/8")			6.35(1/4") / 12.7(1/2")		
Refrigerant line (one way) length [chargeless length]			m	Max.25 [15]			Max.30 [15]		
Vertical height differences			Outdoor is higher/lower	Max.15 / Max.15			Max.20 / Max.20		
Outdoor operating temperature range		Cooling	°CDB	-15~46					
		Heating <td colspan="5">-20~24</td>		-20~24					
Clean filter				Allergen Clear Filter x 1, Photocatalytic Washable Deodorising Filter x 1					

* The data are measured under the following conditions(ISO-T1, H1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

* Sound level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

* 'tonne(s) of CO₂ equivalent' means a quantity of greenhouse gases- expressed as the product of the weight of the greenhouse gases in metric tonnes and of their global warming potential.

CONVENIENCE

Wireless Control System




Control your air conditioner from anywhere, anytime

If you turn on the air conditioner when you're on the go, you'll be comfortable when you get home. Even if you forget to turn it off, you can turn it off when you are out and about.



Wireless LAN Built-in model

Wireless Control System is equipped as standard

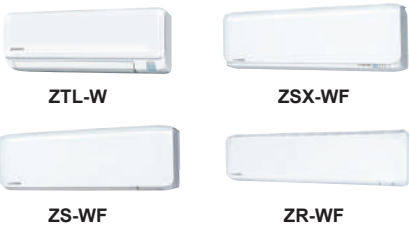


Applicable products

Built-in	Optional
1 SRK-ZSX -WF/-WFB/-WFT	1 SRK-ZSX -W/-WB/-WT/-S
2 SRK-ZR -WF	2 SRK-ZR -W/-S
3 SRK-ZS -WF/-WFB/-WFT	3 SRK-ZS -W/-WB/-WT
4 SRK-ZTL -W	4 SRK-ZS -S/-SB/-ST

You can control the air conditioner at home or on the go by installing Smart M-Air app on your smartphone or tablet.



Search for "Smart M-Air" from the GooglePlay™ store for Android™ and AppStore for iPhone.



Application compatible model: Android™ OS 8-12 smartphones and tablets, iPhone for iOS 12-15

Functions

- 1 Turn ON/OFF
- 2 Change operation mode (Cool, Heat, Dry, Auto)
- 3 Control temperature
- 4 Set Timers
- 5 Favourite setting

Notification Function

- 1 Shut-off reminder alert
- 2 A notification will be sent to your smart device if the air conditioner is accidentally left running
- 3 Hi temp / low temp alert
- 4 Watching function



Weekly Timer

Timers can be set for different days of the week. They can also be set from the calendar.



Home Leave Mode

Heating / Cooling operation is automatically turned on when the room temperature is lower or higher than the set temperature.



Vacant Property Mode

Temperature can be set as follows:
Cooling 31°C to 33°C (interval 1°C),
Heating 10°C to 17°C (interval 1°C)
Only "Cool" and "Heat" operation modes can be selected.



Electricity Bill Graph


Displays an electricity bill by month on a graph.
You can also set the electricity unit cost.

System configuration

Smartphone
Tablet




Internet



Router

* For the units that does not include wireless LAN the function could be used by adopting an option (WF-RAC)



Model :WF-RAC

*SC-BIKN2-E cannot be used simultaneously for system configuration.

Wireless Adaptors airconwithme

Model :INAWMMH10011000

EU/EEA market only

Please access the followings for details.

URL <http://www.airconwithme.com>

email info@airconwithme.com

* These are developed by HMS Industrial Networks.



*Android is a trademark of Google LLC. IOS is a registered trademark of Cisco in the U.S. and other countries and is used under license.