

MSZ-HJ Inverter Heat Pump

Classic Wall Mounted System



Mitsubishi Electric's range of classic, flat panel wall mounted models make use of inverter technology, whilst providing extremely good value for money, costing approximately 20% less than the MSZ-SF equivalent.

These units have extremely quiet sound levels, whilst also delivering economical air conditioning, with improved SCOP/SEER figures.



Note: Catechin filter is optional.




MSZ-HJ - INDOOR UNITS		MSZ-HJ25VA	MSZ-HJ35VA
CAPACITY (kW)	Heating (nominal) Cooling (nominal)	3.15 (0.9-4.4) 2.5 (0.9-3.0)	3.6 (0.9-4.8) 3.15 (1.0-3.7)
	Heating (UK) Cooling (UK)	2.61 (0.74-3.65) 2.48 (0.89-2.97)	2.99 (0.74-3.98) 3.12 (0.99-3.67)
SHF (nominal & UK)		0.89	0.87
COP / EER (nominal)		3.62 / 3.42	3.62 / 3.03
SCOP / SEER (BS EN14825)		3.8 / 5.1	3.8 / 5.1
ErP ENERGY EFFICIENCY CLASS	Heating/Cooling	A / A	A / B
AIRFLOW (m³/min)	Heating/Cooling - Lo-Mi-Hi-SupHi	3.4-5.5-7.5-9.9 / 3.8-5.5-7.3-9.5	3.4-5.5-7.5-10.3 / 3.8-5.7-7.8-10.9
PIPE SIZE mm (in)	Gas Liquid	9.52 (3/8") 6.35 (1/4")	9.52 (3/8") 6.35 (1/4")
SOUND PRESSURE LEVEL (dBA) Heating/Cooling - Lo-Mi-Hi-SupHi		23-30-37-43 / 22-30-37-43	23-30-37-44 / 22-31-37-45
SOUND POWER LEVEL (dBA)		57	60
DIMENSIONS (mm)	Width x Depth x Height	799 x 232 x 290	799 x 232 x 290
WEIGHT (kg)		9	9
ELECTRICAL SUPPLY		220-240v, 50Hz	220-240v, 50Hz
FUSE RATING (BS88) - HRC (A)		10	10
INTERCONNECTING CABLE No. CORES		4	4


MUZ-HJ - OUTDOOR UNITS		MUZ-HJ25VA	MUZ-HJ35VA
SOUND PRESSURE LEVEL (dBA) Heating/Cooling		50 / 50	50 / 50
SOUND POWER LEVEL (dBA) Cooling		63	64
WEIGHT (kg)		24	25
DIMENSIONS (mm)	Width x Depth x Height	699 x 249 x 530	699 x 249 x 530
ELECTRICAL SUPPLY		Fed by Indoor Unit	Fed by Indoor Unit
PHASE		Single	Single
SYSTEM POWER INPUT (kW) Heating/Cooling (nominal)		0.870 / 0.730	0.995 / 1.040
Heating/Cooling (UK)		0.79 / 0.58	0.90 / 0.83
STARTING CURRENT (A)		4.2	4.9
SYSTEM RUNNING CURRENT (A) Heating/Cooling [MAX]		4.2 / 3.7 [5.8]	4.8 / 4.9 [6.5]
FUSE RATING (BS88) - HRC (A)		10	10
MAINS CABLE No. CORES		3	3
MAX PIPE LENGTH (m)		20	20
MAX HEIGHT DIFFERENCE (m)		12	12
CHARGE R410A (kg) - 7m		0.70	0.72

No accessories available.

Upper View

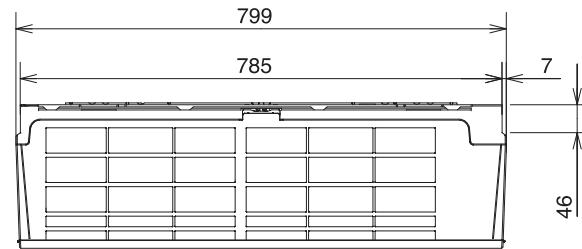

Front View

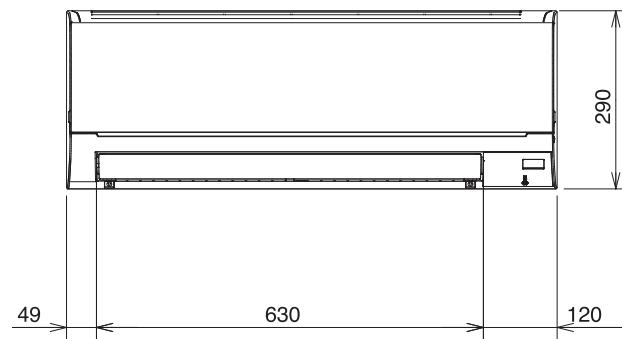

Side View

