



Included Controller.
Timer remote controller
CZ-RTC4
Compatible with Econavi



Optional Controller.
Wired remote controller
CZ-RTC5A
Compatible with Econavi



Optional Econavi Sensor.
CZ-CENSC1




Optional Controller.
Wireless remote controller
CZ-RWSK2



Optional Controller.
Simplified remote controller
CZ-RE2C2

Compatible with all Panasonic connectivity solutions. For detailed information go to the Control Systems section.

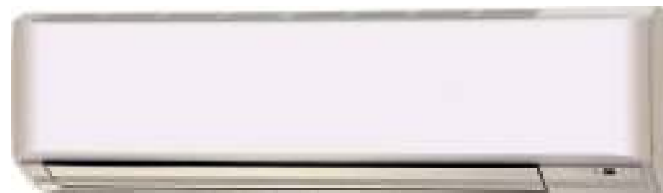

Washable front panel.

The indoor unit's front panel can be easily removed and washed for trouble-free cleaning.

Closed discharge port.

When the unit is turned OFF, the flap closes completely to prevent dust getting into the unit and to keep the equipment clean.

Quiet operation.

These units are among the quietest in the industry, making them ideal for hotels and hospitals.


Smooth and durable design.

The sleek, compact design ensures a discreet installation - even where space is limited.

Piping outlet in three directions.

With three options for pipe outlets-rear, right and left - installation is made easy.

Air distribution is altered depending on the operational mode of the unit.



PACi Elite							
Single Phase				Three Phase			
3.6kW KIT-36PK1E5B4 CZ-RTC4	5.0kW KIT-50PK1E5B4 CZ-RTC4	6.0kW KIT-60PK1E5B4 CZ-RTC4	7.1kW KIT-71PK1E5A4 CZ-RTC4	10.0kW KIT-100PK1E5A4 CZ-RTC4	7.1kW KIT-71PK1E8A4 CZ-RTC4	10.0kW KIT-100PK1E8A4 CZ-RTC4	
3.6 (1.5 - 4.0)	5.0 (1.5 - 5.6)	6.0 (2.0 - 7.1)	7.1 (2.5 - 8.0)	9.5 (3.3 - 10.5)	7.1 (3.2 - 8.0)	9.5 (3.3 - 10.5)	
4.56 (6.25 - 4.30) A	3.57 (6.25 - 3.26) A	3.57 (6.67 - 3.02) A	3.40 (5.56 - 3.02) A	3.25 (3.93 - 3.09) A	3.40 (5.71 - 3.02) A	3.25 (3.93 - 3.09) A	
6.30 A++	6.10 A++	6.60 A++	6.60 A++	6.20 A++	6.10 A++	6.00 A+	
3.6	5.0	6.0	7.1	9.5	7.1	9.5	
0.79 (0.24 - 0.93)	1.40 (0.24 - 1.72)	1.68 (0.30 - 2.35)	2.09 (0.45 - 2.65)	2.92 (0.84 - 3.40)	2.09 (0.56 - 2.65)	2.92 (0.84 - 3.40)	
200	287	318	376	536	407	554	
4.0 (1.5 - 5.0)	5.6 (1.5 - 6.5)	7.0 (1.8 - 8.0)	8.0 (2.0 - 9.0)	9.5 (4.1 - 11.5)	8.0 (2.8 - 9.0)	9.5 (4.1 - 11.5)	
- / -	- / -	- / -	7.52 / 7.65	12.04 / 11.20	7.52 / 7.65	12.04 / 11.20	
4.65 (7.89 - 4.20) A	3.76 (7.89 - 3.39) A	4.02 (9.00 - 3.90) A	3.76 (5.00 - 3.10) A	3.85 (4.56 - 3.43) A	3.76 (5.60 - 3.10) A	3.85 (4.56 - 3.43) A	
4.20 A+	4.00 A+	4.00 A+	3.90 A	3.80 A	3.80 A	3.80 A	
3.6	5.0	6.0	7.1	9.5	7.1	9.5	
0.86 (0.19 - 1.19)	1.49 (0.19 - 1.92)	1.74 (0.20 - 2.05)	2.13 (0.40 - 2.90)	2.47 (0.90 - 3.35)	2.13 (0.50 - 2.90)	2.47 (0.90 - 3.35)	
1200	1749	2101	2548	3500	2616	3500	
S-36PK1E5A	S-50PK1E5A	S-60PK1E5A	S-71PK1E5A	S-100PK1E5A	S-71PK1E8A	S-100PK1E8A	
11.0 / 9.5 / 7.5	14.0 / 12.0 / 10.5	18.0 / 14.5 / 11.5	18.0 / 14.5 / 11.5	19.0 / 16.5 / 13.0	18.0 / 14.5 / 11.5	19.0 / 16.5 / 13.0	
2.1	2.8	3.4	4.2	5.7	4.2	5.7	
35 / 31 / 27	40 / 36 / 32	47 / 44 / 40	47 / 44 / 40	49 / 45 / 41	47 / 44 / 40	49 / 45 / 41	
52 / 46 / 41	57 / 51 / 46	64 / 59 / 54	64 / - / -	65 / - / -	64 / - / -	65 / - / -	
300 x 1065 x 230	300 x 1065 x 230	300 x 1065 x 230	300 x 1065 x 230	300 x 1065 x 230	300 x 1065 x 230	300 x 1065 x 230	
13.0	14.5	14.5	14.5	14.5	14.5	14.5	
U-36PE2E5A	U-50PE2E5A	U-60PE2E5A	U-71PE1E5A	U-100PE1E5A	U-71PE1E8A	U-100PE1E8A	
220 / 230 / 240	220 / 230 / 240	220 / 230 / 240	220 / 230 / 240	220 / 230 / 240	380 / 400 / 415	380 / 400 / 415	
-	-	-	20	25	16	16	
-	-	-	2.5	4.0	2.5	2.5	
3.75 / 3.55 / 3.40	6.25 / 5.95 / 5.70	7.90 / 7.50 / 7.25	9.70 / 9.40 / 9.20	11.6 / 11.2 / 10.9	3.25 / 3.10 / 3.00	3.95 / 3.75 / 3.60	
3.80 / 3.60 / 3.45	6.05 / 5.75 / 5.50	8.50 / 8.15 / 7.80	10.2 / 9.90 / 9.70	12.8 / 12.5 / 12.2	3.35 / 3.20 / 3.10	4.35 / 4.15 / 4.00	
38 / 38	38 / 41	38 / 41	60 / 60	110 / 95	60 / 60	110 / 95	
45 / 46	46 / 48	46 / 49	48 / 50	52 / 52	48 / 50	52 / 52	
64 / 66	65 / 68	65 / 69	65 / 67	69 / 69	65 / 67	69 / 69	
619 x 799 x 299	619 x 799 x 299	619 x 799 x 299	996 x 940 x 340	1416 x 940 x 340	996 x 940 x 340	1416 x 940 x 340	
39	39	40	69	98	71	98	
1/4 (6.35)	1/4 (6.35)	3/8 (9.52)	3/8 (9.52)	3/8 (9.52)	3/8 (9.52)	3/8 (9.52)	
1/2 (12.7)	1/2 (12.7)	5/8 (15.88)	5/8 (15.88)	5/8 (15.88)	5/8 (15.88)	5/8 (15.88)	
3 ~ 40 / 30	3 ~ 40 / 30	3 ~ 40 / 30	5 ~ 50 / 30	5 ~ 75 / 30	5 ~ 50 / 30	5 ~ 75 / 30	
30 / 20	30 / 20	30 / 40	30 / 50	30 / 50	30 / 50	30 / 50	
1.40 / 2.9232	1.40 / 2.9232	1.95 / 4.0716	2.35 / 4.9068	3.40 / 7.0992	2.35 / 4.9068	3.40 / 7.0992	
-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	
-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24	

Accessories

CZ-RTC5A	Wired remote control with Econavi button
CZ-RWSK2	Wireless remote controller
CZ-RE2C2	Simplified remote controller
PAW-GRSTD40	Outdoor elevation platform 400 x 900 x 400mm
PAW-WTRAY	Tray for condenser water compatible with base ground support
PAW-GRDBSE20	Outdoor base ground support for noise and vibration absorption (600 x 95 x 130mm, 500kg)
CZ-140DRS1	PACi Drain kit to suit all PACi system
PAW-PACR3	Interfaces to run 3 units on Backup and alternative run

